ENVIRONMENTAL & SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED BOREHOLE DRILLING & SOLARIZATION AT AL RAHIM COMMUNITY MOSQUE COMPOUND AT TULLU ROBA ISIOLO TOWN IN ISIOLO COUNTY



CONSULTANCY SERVICES FOR ENVIRONMENTAL & SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED INTERVENTIONS FOR ISIOLO, NANYUKI & MANDERA WATER SERVICE

JANUARY, 2025

NTERNAL QUALITY CONTROL

Revision	Purpose description	Originated	Checked	Reviewed	Authorized	Date
Rev 1.0	Issue to Client	Rebecca Karanja	Purity Muthoni	Rebecca Karanja	Rebecca Karanja	8/07/2024
Rev 2	Issue to Client	Rebecca Karanja	Purity Muthoni	Rebecca Karanja	Rebecca Karanja	01/09/2024

CERTIFICATION

We hereby certify that the content of this Environmental and Social Impact Assessment Report for proposed borehole drilling and solarisation at Al Rahim community mosque compound inTullu Roba, Isiolo County is factual and that the content conforms to the provisions of the Environmental Management and Coordination Act Cap. 387 and the Environmental (Impact Assessment and Audit) (Amendment) Regulations, 2003.

CONSULTANT

Name: Dr. Rebecca Karanja

Designation: Lead Expert (NEMA Reg. No 2860)

Signature: 

Date:31/01/2025

PROPONENT

Name: ISIOLO WATER & SANIATION COMPANY

Designation:

Signature……

Date……

TABLE OF CONTENT

INTERNAL QUALITY CONTROL ii
CERTIFICATION iii
TABLE OF CONTENT iv
ABBREVIATIONS viii
0 EXECUTIVE SUMMARY x
0.1 Introduction x
0.2 Project Description x
0.3 Project Methodology xii
0.4 Policy Legal and Regulatory Framework xii
0.5 Public Participation and Stakeholder Engagement xiii
0.6 Project Alternatives xiii
0.8 Potential Project Impacts and Proposed Mitigation Measures xiv
1 INTRODUCTION 1
1.1 Project Background 1
1.2 Project Justification 2
1.3 Purpose of the Study 3
1.4 Objectives of the Study 3
1.5 Scope of the Study 4
1.6 Approach and Methodology 4
1.6.1 ESIA Process 5
1.6.2 Impact Assessment Framework 5
1.6.3 Stakeholder Engagement 6
1.7 Structure of the Comprehensive Project Report (CPR) 6
2 PROJECT DESCRIPTION 8
2.1 Project Location 8
2.1.1 General Project Area 8
2.1.2 Description of the Proposed Project 8
2.2 Project Classification 11
2.3 Total Project Cost 11
3 POLICY, LEGAL AND REGULATORY FRAMEWORK 12
3.1 Introduction 12

3.1.1 The Constitution of Kenya 12
3.1.2 The Kenyan Vision 2030 12
3.1.3 National Policy on Water Resources Management and Development ... 12
3.1.4 Policy Guidelines on Environment and Development 13
3.1.5 Sustainable Development Goals 13
3.1.6 World Bank Operational Procedures 14
3.2 Water Regulatory Framework 14
3.2.1 Water Act, 2016 14
3.2.2 Water Quality Regulations, 2006, (Legal Notice No.121) 15
3.2.3 Water Resources Management Rules, 2007 15
3.2.4 Isiolo County Water and Sanitation Services Act, 2020 16
3.3 Environmental Policy and Regulatory Framework 16
3.3.1 National Environment Action Plan Framework 16
3.3.2 Environment Management & Coordination Act Cap 387 17
3.3.3 The Environmental (Impact Assessment and Audit) Regulations, 2003/Legal Notice 31 & 32 17
3.3.4 Environmental Management and Coordination (Conservation of Biological Diversity) Regulations 2006 18
3.3.5 Environmental Management and Coordination (Wetlands, Riverbanks, Lake Shores and Sea Shore Management) Regulations 2009 18
3.3.6 Environmental Management and Co-ordination (Controlled Substances) Regulations, 2007 18
3.3.7 Environmental Management and Co-ordination (Waste Management) Regulations, 2006 18
3.3.8 Environmental Management and Coordination (Fossil Fuel Emission Control) Regulations 2006 19
3.3.9 Environmental Management and Coordination Act (Noise and Excessive Vibration Pollution) Control Regulations, 2009 19
3.3.10 Isiolo County Climate Fund Act, 2018 20
4 BASELINE CONDITIONS 22
4.1 Physical Characteristics 22
4.2 Topography 23
4.2.1 Drainage and Land Use 23
4.2.2 Geology 23
4.2.3 Climatic conditions 24

4.2.4 Ecological characteristics 26
4.2.5 Socio-Economic Activities 27
4.2.6 Socio Economic Profile of Residents in project Area 28
5 PUBLIC CONSULTATION AND STAKEHOLDER ENGAGEMENT 37
5.1 Introduction 37
5.2 Objectives of Stakeholder Engagement 37
5.3 Stakeholder Mapping 37
5.4 Stakeholder Analysis 39
5.5 Stakeholder Engagement Approach 43
5.6 Household Survey 44
5.7 Focused Group Discussion 44
5.8 Summary of Feedback from the Public 45
5.8.1 Feedback from Public Baraza 46
5.9 Key Informant Interview 46
6 ANALYSIS OF ALTERNATIVES 48
6.1 Introduction 48
6.2 The No Project Alternative 48
6.3 Location Option 49
6.3.1 Water Source 50
7 IMPACT IDENTIFICATION, ANALYSIS 52
7.1 Potential Impacts and Mitigation Measures 52
7.1.1 Impact assessment scoring 52
7.1.2 Construction Phase 55
7.1.1 Positive Impacts During Construction 55
7.1.2 Negative Impacts During Construction 55
7.1.3 Operational Phase 66
7.2 CUMULATIVE IMPACTS 72
7.2.1 Decommissioning Phase 73
8 ENVIRONMENTAL AND SOCIAL MANAGEMENT & MONITORING PLAN 74
8.1 Introduction 74
9 CONCLUSION AND RECOMMENDATION 92
APPENDIX A: Letter of Agreement 96
APPENDIX B: Attendance List and Minutes of Meetings 97

APPENDIX C: BILL OF QUANTITIES 108

LIST OF TABLES

Table 2-1: Project Cost 11
Table 5-1: Mapping of Stakeholders 38
Table 5-2: Analysis of project stakeholders 39
Table 5-3: Methodology adopted in Stakeholder Engagement 43
Table 7-1: Impact significance rating criteria 52
Table 7-2: Significance rating matrix 54
Table 7-3: Mitigation ratings 54

LIST OF FIGURES

Figure 2-1 : Map of Isiolo Town 8
Figure 4-1 : Average Rainfall in Isiolo Town 25
Figure 4-2 : Average Temperature Isiolo Town 26
Figure 4-3 :Villages where questionnaires were administered **Error! Bookmark not defined.**
Figure 4-4 : Age distribution in Tullu Roba 29
Figure 4-5 : Household size..... 29
Figure 4-6 : Ability to read and write 30
Figure 4-7 : Main source of income 30
Figure 4-8 : Duration of Stay in the Household 31
Figure 4-9 : Sources of Energy for cooking 32
Figure 4-10 : Sources of drinking water 32
Figure 4-11 : Distance travelled to access water. 33
Figure 4-12 : Time taken to water source 33
Figure 4-13 : Water Consumption 34
Figure 4-14 :Cost of water 34
Figure 4-15 : Do you want the current water service improved? 35
Figure 4-16 :Mitigation measures 36

ABBREVIATIONS

ACC	Assistant County Commissioner
ASAL	Arid and Semi-Arid Lands
CECM	County Executive Committee Member
CBO	Community Based Organization
CSR	Corporate Social Responsibility
CC	County Commissioner
CP-ESMMP	Construction Phase-Environmental & Social Management and Monitoring Plan
DOSHS	Directorate of Safety and Health Services
DWC	Double Wall Corrugated
EMCA	Environmental Management Coordination Act
EHS	Environmental Health and Safety
ESIA	Environmental and Social Impact Assessment
ESMP	Environmental and Social Management Plan
GDP	Gross Domestic Product
HIV/AIDS	Human Immunodeficiency Virus/ Acquired Immunodeficiency Virus
IWASCO	Isiolo Water & Sanitation Company
KMD	Kenya Meteorological Department (KMD and
LPG	Liquefied Petroleum Gas
MCA	Member of County Assembly
MD	Managing Director
MP	Member of Parliament
MoWSI	Ministry of Water, Sanitation & Irrigation
NEMA	National Environment and Management Authority
NEAP	National Environmental Action Plan
NGO	Non-Governmental Organization
O & M	Operation and Maintenance
OSHA	Occupational Safety and Health Act
PAPs	Project Affected Persons
PPE	Personal Protective Equipment
RC	Reinforced Concrete
RCC	Roller Concrete Compacted
SGR	Standard Gauge Railway

SOPs	Standard Operating Procedures
SSHP	Site Safety Health Procedures
STIs	Sexually Transmitted Diseases
ToR	Terms of Reference
WASREB	Water Services Regulatory Board
WHO	World Health Organization
WRA	Water Resources Authority
WRUA	Water Resources Users Association
WTP	Water Treatment Plant

0 EXECUTIVE SUMMARY

0.1 Introduction

This Environmental Social Impact Assessment Report is prepared in line with the Terms of Reference (TOR) for Consultancy Services for undertaking Environmental and Social Impact Assessment for the proposed interventions for Isiolo, Nanyuki and Mandera Water Service Providers (WSP). It is also prepared as per the Environmental Management Coordination Act CAP 387 provisions for submission to National Environment Management Authority so as to obtain an EIA license before the project commences. The key objective of the assignment is to undertake Environmental and Social Impact Assessment (ESIA) that will identify key environmental and social issues that could emanate from the proposed project and develop appropriate mitigation measures. This will support approval of the proposed intervention by the National Environmental Management Authority (NEMA).

The proposed project is located in Isiolo Town, Isiolo County. Isiolo town is one of the rapidly urbanizing towns in Kenya. Immigrants are largely from Moyale, Marsabit and Mandera. The town is also becoming a centre of interest because of its newly acquired status as a resort city drawing in on the popular Samburu and Shaba Game reserves. With the development of Lamu Port-South Sudan-Ethiopia Transport (LAPSSET) Corridor Project, the town is set to become a transport hub. These factors are set to attract a bigger population to this town. Rapid population increase and urbanization exerts pressure on existing infrastructure particularly water supply. The problem is compounded by the climatic conditions of the area which is predominantly arid. It is against this background that the proponent has proposed to develop a water supply project so as to address the challenge of inadequate water supply in the area.

0.2 Project Description

The project proponent, IWASCO is a utility company responsible for providing water supply and sanitation services in Isiolo County. Its primary mandate includes ensuring reliable water supply to residents and managing wastewater and sewerage systems within its jurisdiction. The project will be implemented through the Conditional Liquidity Support Grant (CLSG) program whose objective is to improve water supply and sanitation services in select north eastern and coastal region and improve the financial performance of WSPs affected by the COVID-19 pandemic. The program is being implemented by Ministry of Water, Sanitation and Irrigation (MoWS&I) through the Water Sector Trust Fund. Under this program, IWASCO has been selected to implement 3 interventions including: drilling and equipping of 5 boreholes, solarization of 7no boreholes, purchase and installation of 1,610DN 15mm consumer meters. In this regard, 7No project sites have been identified. One of the boreholes is located at Al Rahim community mosque compound at Tullu Roba hence the name 'Tullu Roba Borehole'.

The project will entail hydrogeological survey which has been conducted and a report provided. The investigation established that the proposed location will yield ground water at the depth of 230 meters. Following these studies, the proponent will obtain

permits and approvals from NEMA and WRA. Upon getting approvals, the construction work will commence including: borehole drilling to a depth of 230 meters and a diameter of at least 8″. Casing will be inserted into the borehole to prevent collapse and to protect the well from contamination. Gravel packing will be used around the casing to improve filtration and stability. Solarization will be done by way of constructing solar panel ground mount frames, control room and installing batteries, inverters, electrical cables and conduits. The proposed solar system will have a capacity of 7.5KW. 1No.Sunverter SV3/7.5T controller will be installed, 29No. 440W Dayliff solar modules. The ground mount will be 4meters in length. A Lightning arrestor of 5 meters will also be provided. The system will also provide for 1No. PV Disconnect Switch 1000V/40A. A submersible pump will be installed in the borehole. The pump type is Grundfos submersible with a motor capable of delivering 15m3/hr against a head of 150m. Pump testing will be conducted to assess the yield and sustainability of the water source. Other accessories include: adapter set (1¼"), 63mm dia. PVC Dayliff borehole pipe 3m length, 25mm airline pipes, 1No cooling sleeve, 2" x 6" borehole cover and 63mm diameter water meter.

Water samples will be collected and tested for various parameters at IWASCO water treatment plant laboratory to ensure it meets the required quality standards for human consumption. Reticulation will involve connecting the borehole outlet to the mains. There is an existing water main in the area. Once the borehole is operational, it will be handed over to IWASCO for operation and maintenance. The water will be supplied to residents who are already connected to the main but due to low water volumes, they have been experiencing intermittences. This borehole will serve to increase water volume in the main and hence residents who have connections will obtain adequate water quantities. Regular maintenance and monitoring will be conducted by IWASCO to ensure the longevity and efficiency of the borehole.

Al Rahim community mosque is located on Acacia Sub-location, Tullu Roba Location, Isiolo Central Sub- County, Isiolo County. The geographic location of the site is latitude 0.37101470 North, longitude 37.59500 East and elevation of approximately 1074 meters above sea level. It occupies a quarter-acre plot of land. The site is securely enclosed by a live fence and chain link, ensuring controlled access and security. It features semi-permanent structure and the rest of the space is covered with grass. The neighborhood is residential.

Objectives of the ESIA

The specific objectives of the ESIA study include:

- To establish the baseline conditions in the project area so as to determine the likely impacts of the project on existing resources and infrastructures
- Ensuring compliance with relevant environmental and social regulations, policies, and standards at local, national and international level
- To identify both positive and negative environmental impacts associated with the project and provide for mitigation measures

- ❖ Identification and analysis of stakeholders for purposes of stakeholder consultation
- ❖ Evaluating the significance and magnitude of identified impacts to determine their potential importance and consequences.
- ❖ Developing appropriate mitigation measures and management strategies to avoid, minimize, or offset adverse impacts on the environment and affected communities.
- ❖ Preparation of an Environmental and Social Management Plan (ESMP) and an Environmental and Social Monitoring Plan
- ❖ Providing recommendations to enhance the project design and planning to maximize positive impacts and reduce negative impacts on the environment and communities.
- ❖ Creation of awareness about the project and obtain opinions and concerns regarding the proposed project
- ❖ Providing decision-makers with comprehensive information

0.3Project Methodology

The ESIA team conducted Project Screening and Scoping that identified all the environmental impacts associated with the proposed project. A Stakeholder Engagement Plan was developed as per the mapped stakeholders. A household survey was undertaken targeting 15 respondents. Key Informant Interviews were conducted. Public meetings were also held to create awareness about the project and obtain their views. The views of the public and secondary stakeholders are summarized in Chapter Five of this report.

0.4Policy Legal and Regulatory Framework

The following policies and regulatory frameworks were reviewed by the consultant:

- ✓ Isiolo County Water and Sanitation Services Act, 2020
- ✓ Isiolo County Climate Fund Act, 2018
- ✓ The Isiolo County Emergency Fund Act, 2016
- ✓ National Water Policy,
- ✓ Water Act 2016,
- ✓ Water Quality Regulations, 2006, (Legal Notice No.121),
- ✓ Water Resources Management Rules, 2007
- ✓ National Environment Action Plan Framework,
- ✓ Environment Management & Coordination Act Cap 387
- ✓ The Environmental (Impact Assessment and Audit) Regulations, 2003/Legal Notice 31 & 32
- ✓ Environmental Management and Coordination (Conservation of Biological Diversity) Regulations 2006
- ✓ Environmental Management and Coordination (Wetlands, Riverbanks, Lake Shores and Sea Shore Management) Regulations 2009
- ✓ Environmental Management and Co-ordination (Controlled Substances) Regulations, 2007

- ✓ Environmental Management and Co-ordination (Waste Management) Regulations, 2006
- ✓ Environmental Management and Coordination (Fossil Fuel Emission Control) Regulations 2006
- ✓ Environmental Management and Coordination (Noise and Excessive Vibration Pollution) Control Regulations, 2009

0.5 Public Participation and Stakeholder Engagement

The assessment involved mapping and identification of key stakeholders in water supply and generally water resource management. The aim was to inform them of the proposed project, seek their opinion and expertise and develop an environmental management plan based on this input. The key stakeholders engaged include: Department of Water, Environment & Natural Resources; National Government Administration; State Department of Gender & Social Services; State Department of Early Learning & Basic Education; National Government Administration Office-Isiolo. Public consultation involved conducting community meeting at different project sites. Additionally, it involved household data collection to establish individual concerns and opinions with regard to the project. The outcome of these meetings and household survey is annexed to this report.

0.6 Project Alternatives

(i) No Project Alternative:

This alternative entails maintaining the current status quo without implementing the project. Potential negative impacts include continued water shortages, high operational costs due to electricity dependency, and underutilization of local skills. It also risks exacerbating water-related conflicts and vandalism of existing infrastructure. However, opting for the "No Project" alternative would avoid potential environmental disturbances and maintain current conditions.

(ii) Borehole Location Options:

The project proponent evaluated multiple sites based on availability of land, geological suitability, accessibility, environmental impact, water quality, and future land use considerations. Two primary location options were considered: Mosque site and IWASCO-owned land. The proponent through the water line managers were tasked to establish a suitable location in Tulla Roba for development of a borehole. The community in Tulla Roba proposed Al Rahim Mosque which led to discussions and consultations among the mosque leaders. The leaders agreed to have the site used for the borehole project. It was agreed that the project would benefit the entire community through increased water flows and reduced intermittence.

The Mosque site has the advantage of availability of land, security since the site is fenced and community ownership. It is disadvantageous in that there is a perceived lack of direct access ad control. The second option involves acquisition of land by IWASCO. This will be under the full control and management of the IWASCO. However, it is costly and may have regulatory and administrative challenges that characterize land

acquisition. Given the level of funding available, the Tullu Roba Borehole site is preferred as it is more affordable and will not require lengthy acquisition processes. Residents of Isiolo will not have to wait for long to benefit from the increased water supply.

(iii) Water Source Alternatives:

Surface water from River Ewaso Nyiro and groundwater from boreholes were assessed as potential water sources. Surface water offers initial cost advantages but is seasonal and poses environmental risks. Boreholes provide consistent and high-quality water, particularly beneficial during droughts, with minimal impact on surface water resources. Preference leans towards boreholes due to their reliability and sustainability, aligning with long-term water security goals.

0.8 Potential Project Impacts and Proposed Mitigation Measures

Construction Phase	Positive Impacts	Negative Impacts
	I. Job opportunities for the local community especially the youth II. Skill transfer to the local communities III. Promotes local businesses through sourcing of construction Materials locally and other enterprises such as hotels IV. Improvement of infrastructure around the site (through negotiated CSR) e.g. security lighting or water tank V. Improved livelihoods in the area as a result of increased business activities and employment	• Site clearance & borehole drilling activities will generate dust which may affect air quality and the health of nearby residents • The drilling process will likely produce significant noise, which could disturb local residents, especially if construction activities occur during early or late hours. • The project will generate construction waste (e.g., drill cuttings, packaging materials), waste water that needs to be managed properly to avoid environmental contamination. • Borehole drilling may temporarily obstruct access to the mosque compound or neighbouring properties, potentially causing inconvenience to the community. • There are inherent risks associated with drilling works including accidents involving machinery or equipment & solar installations

		• If not managed well, construction activities could lead to conflicts with local residents, especially if they feel that the project disrupts their daily lives • Since the borehole is being constructed within a mosque compound, construction activities could disrupt prayers, madrasas and other events held on the premises. • The project may pose a risk to the community through traffic incidences, moving debris and dust • There may be increased risk of HIV/AIDS transmission particularly due to influx of migrant workers who may engage in casual sexual relationships due to their temporary stay • Workers' influx due to availability of casual employment which may create pressure on services or cultural conflicts • Increased risk of child labour on site due to high number of non-school going children. • Children may be indirectly involved through sale of food and provision of support services • Construction sites pose a risk of sexual exploitation and abuse from rogue workers.
Mitigation Measures	• Regularly water the borehole site to suppress dust. Three times a day is recommended as the area is dry with minimal vegetation cover • Cover construction materials and stockpiles to minimize dust emissions. • Schedule noisy activities during daytime hours to minimize disturbances to residents. Avoid working during prayer hours • Set up designated areas for construction waste and ensure proper disposal or recycling of materials like drill cuttings and packaging. Disposal should be done by a licensed waste collector	

	• The contractor will construct a pond to drain waste water from the well. The water will be drained off by a licensed exhauster for disposal The waste water pond will be sealed off to avoid incidences and consumption by livestock • Notify the community in advance about potential disruptions and provide alternative access routes. • Provide thorough training for all workers on safe practices and emergency procedures. • Ensure that appropriate personal protective equipment (PPE) is used by all personnel. • Develop and implement a comprehensive safety plan that includes protocols for machinery operation and emergency response. • Maintain open lines of communication with local residents and stakeholders to address concerns and provide updates. The Contractor EHS & IWASCO should facilitate this • Establish a system for residents to voice concerns or report issues related to the construction project. • Hold meetings to inform the community about the project's progress and any expected impacts. • Keep the mosque community informed about the drilling & solar installation schedule and any expected disruptions.	
Operation Phase	Positive Impacts	Negative Impacts
	Direct Impacts i. Regular supply of portable water to the mosque & residents of Tullu Roba area ii. Reduction of operation & maintenance costs as a result of solarisation iii. Increased revenue to IWASCO *Cumulative Impacts* iv. Reduced cases of water borne diseases among the locals v. Establishment/Improvement of livelihoods vi. Improved local economic development vii. Institutional strengthening & Capacity building for the water company viii. Increased tree cover in the area	*Direct Impacts* • Concerns about water quality, such as high salinity or contamination, which could affect community health. • Risk of disrupted services during low sunshine months Cumulative Impacts • Significant reduction in water levels or drying up of the well will cause water intermittence and increased waterborne diseases • Continuous extraction may lead to lowered water tables, impacting local ecosystems and vegetation.
Mitigation Measures	• Regular testing and monitoring of water quality by IWASCO and WRA to ensure it meets safety standards	

	• Implementation of institutional /community awareness programs on water hygiene and safe usage practices. • Implementing sustainable groundwater management practices to prevent depletion, such as recharge projects or water conservation measures. • Establishing a regular maintenance schedule for boreholes, pumps, and treatment facilities. • Sensitizing mosque & neighbouring community on borehole safety protocols e.g. access control, emergency response in case of contamination and environmental protection • Promoting integrated water resources management that includes rainwater harvesting, groundwater recharge, and use of alternative water sources. • Provide storage structures to provide water during the low sunshine hours • Implementing effective billing systems and revenue collection mechanisms to enable continued operation and maintenance • Provide barriers around the site and erect warning signages outside the mosque compound • Conduct HIV/AIDS sensitization to workers and community through weekly talks and on site sensitization materials • Prioritize locals in provision of employment opportunities and sensitize workers and migrants acceptable social conduct in this community • Establish an employment policy which regulates the age of workers to those above 18 years. • Provide signages with sensitization and warning messages against sexual exploitation and abuse • Develop a code of conduct for workers on matters sexual exploitation and abuse and sensitize the community on the GRM procedure.
Recommendations	• Ensure public participation in all project stages • IWASCO should involve all relevant stakeholders from the planning, design, construction to commissioning • Engage the local leaders to create a 'buy in' and project support to ensure sustainability • IWASCO should institute a continuous sensitization program on the project

0.9 Environment & Social Management Plan

The ESMP provides a summary of mitigation actions to be implemented during the construction and operation of this proposed water project. To ensure successful implementation, IWASCO will ensure that the ESMP is adhered to through communicating the ESMP to the contractor and other stakeholders and monitoring compliance. This will be done through the environment department. The contractor (s) will be required to develop and execute the CP-ESMP, conduct regular monitoring, and report on compliance with mitigation measures on a weekly basis. Both the IWASCO and contractor will need to engagement with local communities, including feedback mechanisms to address concerns related to the project.

1 INTRODUCTION

1.1 Project Background

Isiolo County is situated in the eastern part of Kenya and covers an area of approximately 25,336 square kilometres. About 65% of Isiolo County is very arid, 30% arid, and 5% semi-arid[1]. The climate is characterized by high temperatures and low rainfall, typically ranging from 150mm to 650mm annually. The current state of water supply in Isiolo County is a complex issue characterized by significant challenges related to infrastructure, resource management, and environmental conditions. The primary surface water source in the county is the Ewaso Ng'iro River, which is a crucial water source for both domestic and agricultural use. However, its flow is highly seasonal and unreliable, often drying up during drought periods. There are a few small dams and water pans that capture and store rainwater. These structures are critical for providing water during dry periods, but they are often poorly maintained and suffer from evaporation losses.

Groundwater is a major source of water in Isiolo. The county has several boreholes and wells, but many of them are not operational due to technical failures, poor maintenance, or salinity issues. High fluoride levels in some areas also limit the usability of groundwater. The ground water is distributed unevenly, and in some areas, the aquifers are not adequately replenished, leading to depletion. In view of this, improved water access in Isiolo calls for increased investment in groundwater through drilling of boreholes, rehabilitation of existing wells, instituting sustainable maintenance strategies and increasing the capacity of the water treatment plant to address water quality challenges. It against this background that Isiolo Water and Sewerage Company (IWASCO) has proposed to drill and equip 5 boreholes within Isiolo town.

The proposed project is a component of the Conditional Liquidity Support Grant (CLSG) program whose objective is to improve water supply and sanitation services in select north eastern and coastal region and improve the financial performance of WSPs affected by the COVID-19 pandemic. The program is being implemented by Ministry of Water, Sanitation and Irrigation (MoWS&I) through the Water Sector Trust Fund. Under this program, IWASCO has been selected to implement 3 interventions including: drilling and equipping of 5 boreholes, solarisation of 7no boreholes, purchase and installation of 1,610DN 15mm consumer meters. IWASCO is a utility company responsible for providing water supply and sanitation services in Isiolo County. Its primary mandate includes ensuring reliable water supply to residents and managing wastewater and sewerage systems within its jurisdiction. It ensures access to clean and

1 [1] Thiakunu et al., 2023 Camel Herd Structure and Performance in Isiolo and Marsabit Counties, Kenya

safe drinking water while also managing sanitation infrastructure to improve public health and environmental sustainability in the county.

The project is expected to contribute towards increased water access in line with the 2010 Kenyan Constitution which entitles citizens a right to "reasonable standards of sanitation" and "clean and safe water in adequate quantities". The constitution under Article 21 further places an obligation on the government to take steps to progressively realize this right. Additionally, Kenya's Vision 2030 for water and sanitation seeks to ensure that improved water access to all. The goal of the Third Medium Term Plan is to improve access to water and sanitation, have an innovative self-financing mechanism for the sector, and adequate investment planning to move the water sector into the path of Vision 2030. The economic, social, and political pillars of the vision 2030 are further anchored on infrastructure as one of the key foundation for the Vision 2030. Therefore, water facilities are a critical impetus to achieving the development initiative Water Sector Trust Fund, has engaged an individual consultant to undertake an Environmental and Social Impact Assessment for the proposed intervention to aid in the Implementation of the project.

1.2 Project Justification

The proposed project will allow for increased water access through diversification of water sources. It will provide an alternative water source that can supplement existing water supply from Ewaso Nyiro river which is not reliable particularly during the dry season. This will improve water security for residents, businesses, and institutions in Isiolo Town.

Additional boreholes in Isiolo Town will support local economic activities such as urban agriculture and businesses, which depend heavily on water availability. Given the rapid growth of the town, water access will foster economic growth of the town which will lead to increased household incomes and improved standards of living.

Rapid urbanization and population growth in Isiolo implies increased strain on existing water resources which may lead waterborne diseases such as Cholera and typhoid which are the most prevalent in this county. The project will increase the existing water supply and hence mitigate against an upsurge of waterborne diseases

With changing climate patterns leading to increased drought occurrences in many regions, including Isiolo, the proposed boreholes can serve as a climate-resilient solution by providing a sustainable water supply that is less vulnerable to climate variability.

1.3 Purpose of the Study

The implementation this project provides multiple benefits to both the targeted community and the country as well. These benefits include increased water supply, reduction of operational and maintenance cost, enhanced public health and economic development. More specifically, drilling of boreholes will help in improving accessibility to clean water for the residents, ensuring consistent water supply and improved sanitation among residents. However, it is notable that the construction and operation processes may generate negative environmental and social impacts. Such negative effects if not properly managed may obscure the realization of benefits anticipated from the proposed development. It is therefore paramount that a comprehensive assessment of possible negative impacts is undertaken to identify mitigation measures and safeguards that need to be instituted during the project period.

In an attempt to ensure that development provides optimal benefits without creating a significant social and environmental burden, the Government of Kenya has put in place wide range of policy, institutional, and legislative framework to address major causes of environmental degradation and negative impacts on ecosystems deriving from development programs. It is now accepted that development projects must be economically viable, socially acceptable and environmentally sound. It is an obligation of the Kenya Government to conduct an Environmental and Social Impact Assessment (ESIA) on development projects such as the proposed one. The ESIA assesses the impacts of a proposed project before commencement of implementation. In addition to helping formulate environmental management framework, ESIA provides for public participation in the decision-making process within the proposed project.

1.4 Objectives of the Study

The specific objectives of the ESIA study include:

- ✓ To establish the baseline conditions in the project area so as to determine the likely impacts of the project on existing resources and infrastructures
- ✓ Ensuring compliance with relevant environmental and social regulations, policies, and standards at local, national and international level
- ✓ To identify both positive and negative environmental impacts associated with the project and provide for mitigation measures of the negative impacts.
- ✓ Identification and analysis of stakeholders relevant to the project at both national and local levels for purposes of stakeholder consultation
- ✓ Evaluating the significance and magnitude of identified impacts to determine their potential importance and consequences.

- ✓ Developing appropriate mitigation measures and management strategies to avoid, minimize, or offset adverse impacts on the environment and affected communities.
- ✓ Preparation of an Environmental and Social Management Plan (ESMP) and an Environmental and Social Monitoring Plan including proposed work programs, budget estimates, schedules, staffing and training requirements, and other necessary support services to implement the mitigating measures.
- ✓ Providing recommendations to enhance the project design and planning to maximize positive impacts and reduce negative impacts on the environment and communities.
- ✓ Creation of awareness about the project and obtain opinions and concerns regarding the proposed project i.e. location, design, operation and management through public participation and consultation meetings as per Part II Section 17 of the Environmental (Impact assessment and Audit) Regulations, 2003
- ✓ Providing decision-makers with comprehensive information and analysis to support informed decision-making regarding project approval, modification, or rejection.

1.5 Scope of the Study

In accordance with the ToR[2], the scope of the assignment entails:

a) Detailed description of the proposed project
b) Assessment of the baseline conditions in the project area
c) Stakeholder engagement
d) Analysis and Assessment of Potential impacts and recommendations for mitigation and potential development needs
e) Cumulative impact assessment
f) Waste Management (Solid and liquid/ effluents/wastewater)
g) Analysis of the relevant policy, legal and regulatory frameworks
h) Analysis of alternative to the project site, design and inputs
i) Development of an environmental and social management and monitoring plan

1.6 Approach and Methodology

The ESIA study utilized a systematic approach to identify the environmental and social impacts of a project, and describing the mitigation, management and monitoring measures that will be implemented to address these impacts. The approach also entailed stakeholder engagement. Ultimately, the study allows relevant organizations to make

[2] Ministry of Water, Sanitation and Irrigation (MoWS&I) TOR for conducting ESIA

informed decisions about development proposals, and potentially affected stakeholders to participate in the process.

1.6.1 ESIA Process

1.6.1.1 Screening

It comprises of the initial identification of potential interactions between the Project and physical, ecological and human receptors indicating the level of impact assessment required. It also involves examination of relevant national and international legislative requirements and an illustration of the potential interactions of project activities with the physical, ecological and human receptors.

1.6.1.2 Scoping

This stage outlines the perceived required scope of the ESIA to be undertaken, taking into consideration the nature of the Project, the results of the screening and applicable requirements. This stage included:

a) **Issues Identification**- a process of systematic identification of potential interactions between Project activities or events and known receptors
b) **Desk-Based Studies**- a review of existing environmental and social information, and gap analysis to identify additional baseline information required for the impact assessment.
c) **Identifying receptors-** Identification of potential physical, ecological, and human receptors that may be affected by the Project
d) **Analysis of Alternatives**- undertaking an analysis of technically and financially feasible alternatives for the proposed project sites.

1.6.1.3 Baseline Field Surveys and Studies

Field Studies included:

- **Baseline Survey:** The Consultant will undertake a household survey within the project area to understand the existing socio-economic conditions. The information will be used in assessing the socio economic implications of the proposed project.


1.6.2 Impact Assessment Framework

The process of assessing the potential project impacts is centred on the following aspects:

- Prediction-What will happen to the environment because of this project?
- Evaluation-Will it have a beneficial or adverse effect? How big is the change expected to be? How important will it be to the affected receptors?

- Mitigation: If the impact is of concern, can anything be done to avoid, minimise, or offset the impact or to enhance potential benefits?
- Residual Impact: After mitigation, is the impact still of concern?

The hierarchy as illustrated in the chart below will inform the mitigation measures:

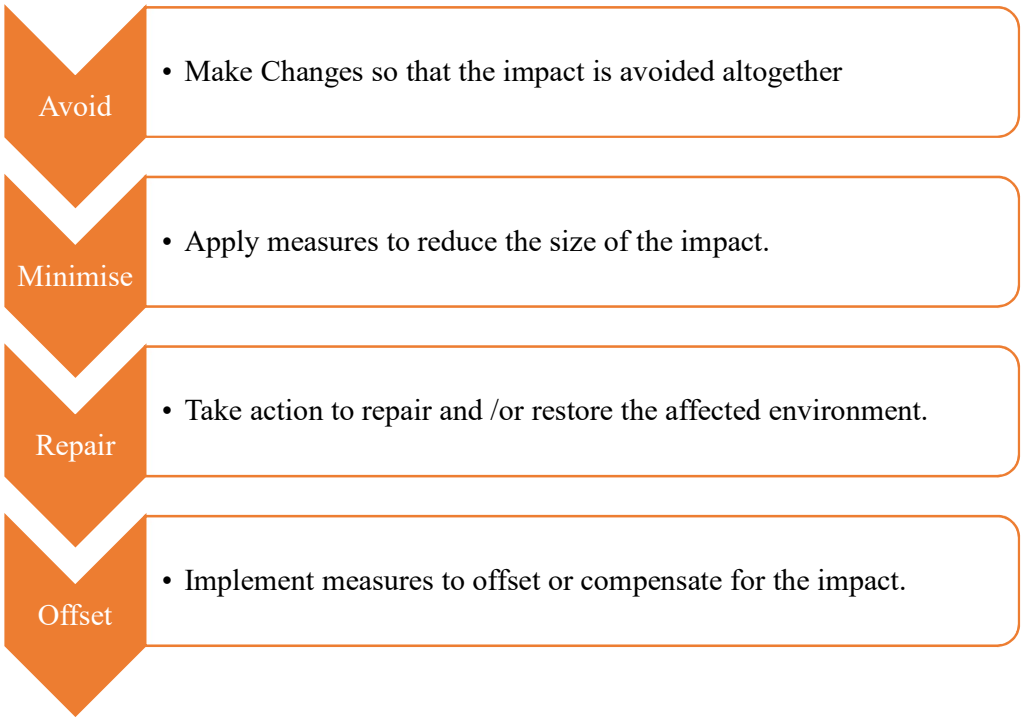

Environmental and Social Management Plans (ESMPs) are developed to capture all mitigation and management measures, and environmental and social commitments made within the ESIA Report. Adherence to these plans will be a condition of any Project construction and operation contracts awarded.

1.6.3 Stakeholder Engagement

The ESIA team mapped out the relevant stakeholders who are likely to be affected by the proposed project either directly or indirectly. A stakeholder analysis was conducted to determine their level of power and interest in order to know the best approach for engaging them and the significance of their input to the project. The outcome of this engagement is analysed in the Public Participation Chapter of this report.

1.7 Structure of the Comprehensive Project Report (CPR)

Environmental and social impact assessment will include:

Executive summary: This section presents a summary of the entire report.

Chapter 1: Introduction: This chapter gives description of the Project Background, Justification of the Project, Study Methodology and Field Findings, and Scope and Content of the project.

Chapter 2: Project description: This chapter gives a description of the status of the project in the project cycle, specifically during construction, operation and decommissioning.

Chapter 3: Policy, legal and institutional / administrative framework: This chapter outlines the overview of legislative framework, regulatory, international guidelines and conventions relevant to this project.

Chapter 4: Environmental setting: This chapter gives description of the environmental setting of proposed project and surrounding areas, e.g., climate, soils, geology, vegetation, fauna, land use, human populations, socio-economics, cultural heritage.

Chapter 5: Stakeholder Engagement: This chapter gives description of the objectives, methods used and summary of results of the public consultation activities undertaken during the ESIA.

Chapter 6: Analysis of alternatives: This chapter gives a description of the project details of the proposed project, alternative options, designs and implementation strategies.

Chapter 7: Assessment of environmental impacts and mitigation measures: This chapter presents the analysis of beneficial and adverse impacts of the project on the biophysical and human (social, cultural and economic) environments. The analysis covers anticipated impacts during the construction, operation phases and decommissioning phases and describes the enhancement and mitigation measures proposed to enhance benefits.

Chapter 8: Environmental and social management and monitoring Plans: This chapter presents the proposed Environmental and Social Management and Monitoring Plans prepared for the project.

Chapter 9: Conclusion and recommendations: The conclusion briefly presents the environmental and social acceptability of the project, taking into account the impacts, measures and recommendations identified during the assessment process.

Appendix and Annex: This section presents attached documents such as Minutes and supplementary reports.

2 PROJECT DESCRIPTION

2.1 Project Location

2.1.1 General Project Area

The proposed project will be located at Al Rahim Community Mosque at Tullu Roba, Tullu Roba Location in Isiolo Town, within Isiolo Sub County. Isiolo County borders Marsabit County to the North, Samburu and Laikipia Counties to the West, Garissa County to the South East, Wajir County to the North East, Tana River and Kitui Counties to the South and Meru and Tharaka Nithi Counties to the South West. It covers an area of 25,605km2. Isiolo is approximately 280KM North-East of Nairobi city via the (A2) Nairobi-Nanyuki-Isiolo Road.

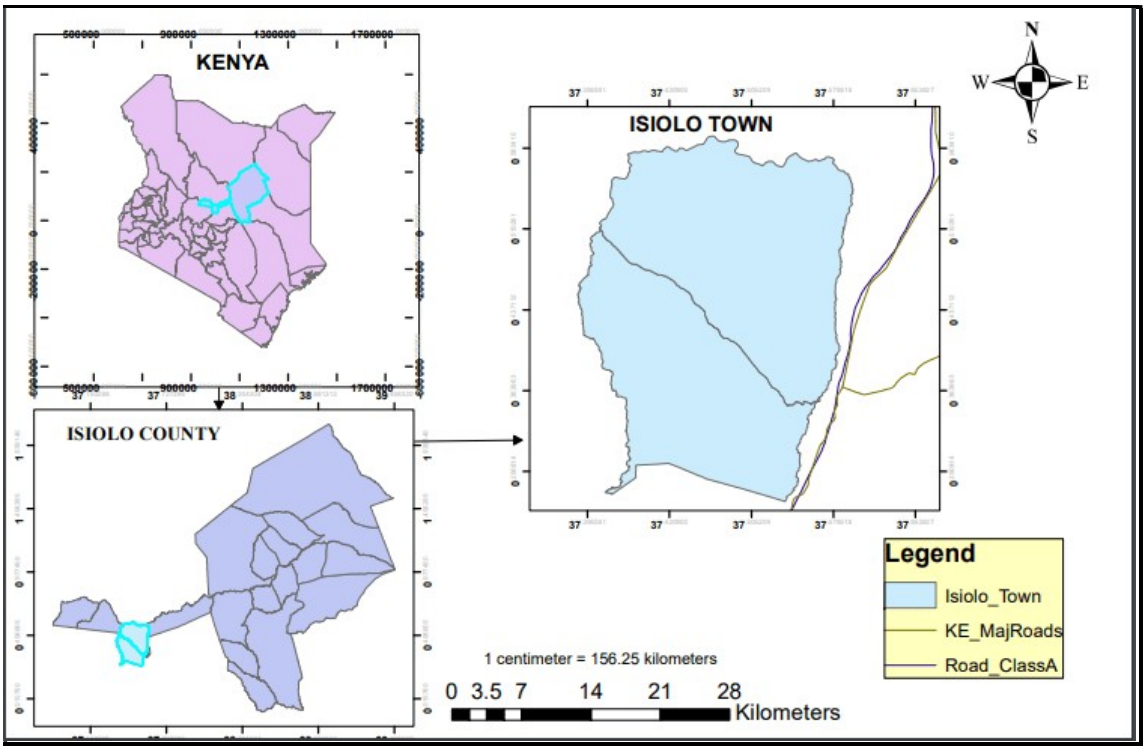


Figure 2-1: Map of Isiolo Town

2.1.2 Description of the Proposed Project

The proposed project will entail site identification (which has already been done in consultation with the community), hydrogeological assessment (already conducted), acquisition of permits, borehole drilling, test pumping and surface casing. Following the drilling works, a solar system will be set up for purposes of pumping water. The proposed works will include:

PLANNING PHASE

Survey & Site Selection

This activity entails conducting a preliminary hydrogeological survey to identify potential groundwater sources. Geophysical survey is employed to determine the best location for drilling based on water availability and quality. A hydrogeological survey has been conducted and a report provided. The investigation established that the proposed location will yield ground water at the depth of 230 meters. It recommended water quality assessment upon drilling to establish the suitability of water for human consumption.

Permitting and Approvals:

As part of the project planning phase, the proponent will obtain necessary permits and approvals from authorities and regulatory bodies including EIA license and WRA permit. This report will be submitted to NEMA for review after which a determination will be made concerning issuance of license.

CONSTRUCTION PHASE

Drilling:

Once the site is selected and permits are secured, the proponent will engage a contractor to undertake the drilling works. The contractor will mobilize drilling equipment to the site. The borehole should have a diameter of at least 8″. Drilling will be done to a depth of depth of 230 meters.

Installation of Casing:

Casing will be inserted into the borehole to prevent collapse and to protect the well from contamination. Gravel packing will be used around the casing to improve filtration and stability.

Solar Instillation

Borehole solarization will entail construction of solar panel frames and ground mount points for control room housing the, batteries, inverters, electrical cables and conduits. Borehole solarization will entail construction of solar panel frames and ground mount points for control room housing the, batteries, inverters, electrical cables and conduits. The proposed solar system will have a capacity of 7.5KW. 1No. Sunverter SV3/7.5T controller will be installed and 29No. 440W Dayliff solar modules. The ground mount will be 4meters in length. A Lightning arrestor of 5 meters will be provided. The system will also provide for 2No. PV Disconnect Switch 1000V/40A.

Development:

After drilling, the borehole will be developed to increase its yield. This will involve pumping to remove fine materials and improve water flow from the aquifer into the well.

Pump Installation and Testing:

A submersible pump will be installed in the borehole. The pump type is Grundfos submersible with a motor capable of delivering 15m3/hr against a head of 150m. Pump testing will be conducted to assess the yield and sustainability of the water source. Other accessories include: adapter set (1¼"), 63mm dia. PVC Dayliff borehole pipe 3m length, 25mm airline pipes, 1No cooling sleeve , 2" x 6" borehole cover and 63mm diameter water meter.

Water Quality Testing:

Water samples will be collected and tested for various parameters to ensure it meets the required quality standards for human consumption. This will be done in IWASCO water treatment plant which has a licensed laboratory. Testing will be done for chemical, physical and bacteriological analysis before the water is made available for use. Water quality analysis results will be submitted to WRA for issuance of a permit.

Steel Tank Installation

A steel tank will be mounted to facilitate water storage and reticulation. The tank will be 50 cubic meters elevated on 15 meters tower.

Reticulation

Upon testing the water quality, IWASCO will connect the borehole to the existing water mains. This will entail trenching and pipelaying from the borehole (within the compound) to the existing main which is 80 meters from the well. IWASCO will ensure materials used are of good quality to prevent leakage and pipeline degradation which will compromise the water quality. The water will be supplied to residents who are already connected to the main but due to low water volumes, they have been experiencing intermittences. This borehole will serve to increase water volume in the main and hence residents who have connections will obtain adequate water quantities.

Handover and Maintenance

Once the borehole is operational, it will be handed over to IWASCO for operation and maintenance. Regular maintenance and monitoring will be conducted by IWASCO to ensure the longevity and efficiency of the borehole.

2.2 Project Classification

According to the Environmental Management and Coordination Act, No. 8 of 1999, projects should be classified as either Low Risk Project, Medium Risk Project or a High Risk Project. An analysis of the proposed borehole drilling and solarisation as per the Second Schedule of the EMCA Act shows that the project will be classified as a **Medium Risk Project** *ref. Legal Notice 31 (3a) Drilling for purposes of utilizing groundwater*. This requires a comprehensive project report to be submitted.

2.3 Total Project Cost

The total project cost is for the proposed project is estimated at Five Million Ninety-One Thousand and Five Hundred Kenya shillings (**5,091,500)**

Table 2-1: Project Cost

ACTIVITY	COST
DRILLING BOREHOLE	1,991,750.00
BOREHOLE EQUIPPING	1,000,250.00
STEEL TANK INSTALLATION	2,099,500.00
TOTAL	**5,091,500.00**

3 POLICY, LEGAL AND REGULATORY FRAMEWORK

3.1 Introduction

3.1.1 The Constitution of Kenya

The Constitution is the supreme law of the Republic and binds all persons and all State organs at all levels of government. In relation to the environment, article 42 of chapter one, *The Bill of Rights,* confers to every person the right to a clean and healthy environment, which includes the right to have the environment protected for the benefit of present and future generations through legislative measures, particularly those anticipated in Article 69, and to have obligations relating to the environment fulfilled under Article 70. In addition, Article 21 entrenches water as a constitutional right by establishing a right to "clean and safe water in adequate quantities". This article places an obligation on the government to take steps to progressively realize this right.

3.1.2 The Kenyan Vision 2030

The Kenya Vision 2030 is a policy document outlining Kenya's development programme covering the period between the years 2008 to the year 2030. The objective of Vision 2030 is to help transform Kenya into a newly industrializing, middle-income country providing a high quality of life to all its citizens in a clean and secure environment by 2030. Additionally, the Kenya Vision 2030 also has environmental goals outlined under the social pillar. According to the pillar, Kenya aims to be a clean, safe and sustainable environment by 2030. The country aims to achieve this goal by for example, improving pollution and waste management strategies. By commissioning an environmental impact assessment study for the project, the proponent has displayed his desire to support the Kenya Vision 2030. Further, the development blue print seeks to ensure that improved water and sanitation is available and accessible to all. The main goal is to **improve access to water** and sanitation, have an **innovative self-financing mechanism for the sector**, and adequate investment planning to move the water sector into the path of Vision 2030. The economic, social, and political pillars of the vision 2030 are further anchored on infrastructure as one of the key foundations for the Vision 2030.

3.1.3 National Policy on Water Resources Management and Development

The National Water Policy of April 1999, known as Sessional Paper No. 1 of 1999, advocates for decentralizing operational activities from the central government to various sectors, including local authorities, the private sector, and encouraging community involvement. This decentralization aims to enhance efficiency in delivering water services. The policy addresses issues such as water supply, sanitation facilities development, institutional framework, and financing within the water sector. Its overarching goal is to establish a rational and efficient framework to meet water needs

for national economic development, poverty alleviation, environmental protection, and the social wellbeing of citizens through sustainable water resource management.

This approach encourages Isiolo county government to play active roles in improving water service delivery efficiency. By implementing sustainable water resource management practices and ensuring adequate infrastructure development, Isiolo can meet its water supply needs effectively. *The policy also underscores the significance of institutional frameworks and financing mechanisms tailored to local contexts, which IWASCO can utilize to enhance their operational capabilities and ensure equitable access to clean water for all residents. This Conditional Liquidity Support Grant (CLSG) program provides an opportunity for water infrastructure development through an innovative funding mechanism*.

3.1.4 Policy Guidelines on Environment and Development

Among the key objectives of the Policy Paper on Environment and Development (Sessional Paper No.6 of 1999) are: -

a) To ensure that from the onset, all development policies, programmes and projectstake environmental considerations into account,

b) To ensure that an independent environmental impact assessment (EIA) report is prepared for any industrial venture or other development before implementation,

c) To come up with effluent treatment standards this will conform to acceptable healthstandards.

Under this paper, broad categories of development issues were covered that require sustainable approach these issues include the waste management and human settlement sectors. The policy recommended the need for enhanced re-use/recycling of residues including wastewater, non-waste technologies, increased public awareness raising and appreciation of clean environment. *The proponent, IWASCO is therefore obligated to provide waste water management system to those who will be connected to the proposed water supply network.*

3.1.5 Sustainable Development Goals

Goal number eleven of the global sustainable development goals focuses on making cities inclusive, safe, resilient and sustainable. Some of the goal's targets which are relevant to the project include: to ensure access for all to; adequate, safe and affordable housing and basic services and upgrade slums by 2030 and to enhance inclusive and sustainable urbanization and capacity for sustainable human settlement planning in all countries by 2030. *The proposed project will contribute to this goal directly through*

increased access to water supply among urban residents of Isiolo which will consequently lead to sustainable urbanization.

3.1.6 World Bank Operational Procedures

The following safeguards may be triggered in the course of project implementation

Environmental and Social Assessment:

- OP 4.01 Environmental Assessment: This project falls within the category of projects requiring environmental impact assessment. This implies that the project requires the assessment of potential environmental impacts and mitigation measures before approval. This includes evaluating groundwater quality, availability, and impacts on local ecosystems.

Water Resource Management:

- OP 4.07 Water Resources: Focuses on sustainable water resource management, including assessing the long-term availability and quality of water. The project should therefore allow for monitoring groundwater levels, recharge rates, and potential impacts on local water sources.

3.2 Water Regulatory Framework

3.2.1 Water Act, 2016

The Water Act 2016 provides for the management, conservation, use and control of water resources and for the acquisition and regulation of rights to use water. Under this provision, the responsibility to regulate access, use and control of water resources is vested with the Water Resource Authority (WRA). Further it provides for the inclusion of communities living along the water resources in development projects. The Water Resource User Association (WRUA) are for consideration of project impacts on the community.

Part II section 18 of this act provides for the national monitoring and information systems on water resources. Sub-section 3 of this allows the water management authority to demand from any person or institution, specified information samples or raw Material on water resources. Under these rules, specific records may require to be kept by a site operator and the information made available to the authorities as and when required.

Section 73 of the act allows a person with a license to supply water to make regulations for purposes of protecting against degradation of water resources. Section 75 allows the licensee to construct and maintain drains, sewers and other works for intercepting, treating or disposing of any foul water arising or flowing upon land for preventing pollution of water within their jurisdiction. In Kenya, water is regarded as a national

resource and is therefore owned by the state for and on behalf of the people (Section 3).

Section 36 requires applications for permit made in case of proposed diversion, abstraction, obstruction, storage or use of water from a water body.

IWASCO is required to obtain a permit for purposes of abstracting underground water. It is also a requirement to regularly undertake sample testing to determine the quality of water. These records should be availed to WRA upon request. IWASCO is also required to design regulations for purposes of mitigating degradation of the well.

3.2.2 Water Quality Regulations, 2006, (Legal Notice No.121)

Water Quality Regulations apply to water used for domestic, industrial, agricultural and recreational purposes; water used for fisheries and wildlife purposes; and water used for any other purposes.

No person is allowed to abstract water from a natural water body for domestic purposes unless such water meets the standards set out in the First Schedule.

These regulations provide for the protection of lakes, rivers, streams springs, wells and other sources. The overriding objective of the regulations is to protect human health and the environment. Proper enforcement of the regulations can lead to marked reduction in water-borne diseases. The regulations provide guidelines and standards for the discharge of poisons, toxins, radioactive and other pollutants into the aquatic environment. Standards have also been set for discharge of effluent into the sewer and aquatic environment. The National Environment Management Authority regulates discharge into the aquatic environment.

Persons (real or legal) discharging effluent into the environment are required to submit quarterly discharge monitoring records to NEMA.

IWASCO is obligated to undertake water quality assessment prior to operationalization of the borehole.

3.2.3 Water Resources Management Rules, 2007

The project will be required to submit authorization to the Water Resources Authority within 12 months of the commencement of the rules as stated in Part II Section 17 (1). Failure to submit the documents may be used as a basis for revocation, variation or cancellation of the permit or authorization.

Part VII Section 97 of the Rules states that the Authority shall, where applicable, require an applicant to show evidence of compliance with the provisions of EMCA. Section 99 states the need for controlling and measuring devises for accurate measurement of the water abstracted.

The WRA Rules, 2007, Part VIII Section 104, states that the Authority shall be paid for water abstracted by any person in possession of a valid water permit or supposed to have a valid water permit.

IWASCO shall submit an ESIA license to WRA for authorization of the proposed works.

3.2.4 Isiolo County Water and Sanitation Services Act, 2020

The Isiolo Water and Sanitation Services Act of 2020 is a pivotal legislative framework aimed at governing water resources management and sanitation services within Isiolo County. Central to this Act is the establishment of a Water Directorate, tasked with regulating and overseeing the provision and management of water supply services throughout the county. This Directorate plays a crucial role in ensuring compliance with water management regulations, coordinating water resource development efforts, and maintaining equitable allocation among residential, industrial, and agricultural users.

The Act also introduces water tariff regulations, which define the pricing structure for water services to cover operational costs and promote conservation. Furthermore, it addresses sanitation services, encompassing wastewater management and infrastructure development to enhance public health standards. Emphasizing community participation and stakeholder engagement, the Act seeks to foster partnerships with local communities, NGOs, and the private sector to improve water service delivery and sustainability. Enforcement mechanisms ensure adherence to regulations, underscoring the Act's commitment to sustainable water resource management and sanitation improvements in Isiolo County.

IWASCO will endeavour to comply with the Act with regard to the tariff system, conservation of water and community and stakeholder engagement in the development of this proposed project. This ESIA provides an opportunity for this broad engagement. The outcome of which is recorded in the public participation chapter 5.

3.3 Environmental Policy and Regulatory Framework

3.3.1 National Environment Action Plan Framework

The National Environmental Action Plan Framework is the second national environmental policy after the 1994 National Environmental Action Plan (NEAP). The development of NEAP is provided for by EMC (amendment) Act 2015 which requires preparation of Environmental Action Plan at different levels; County and national levels. The framework recognizes the intertwined linkages between economic growth and environment in Kenya. It highlights priority themes and activities for the country towards achieving sustainable environment.

3.3.2 Environment Management & Coordination Act Cap 387

This Act of Parliament, EMCA 1999 and the subsequent amendments, is the parent Act of Parliament that provides for the establishment of appropriate legal and institutional framework for the management of the environment and for matters connected therewith and incidental thereto.

EMCA, in its 13 interrelated parts, provides regulatory provisions for all levels of environmental conservation and management. The first one part provides legislative guidelines on administrative and planning components of environmental management. They include; (I); General principles (II); Administration (III); Environmental planning (IV); Protection and Conservation of the Environment. Parts five to seven focus on on-field management of the environment as an integral component of actual or proposed projects. (V), Environmental impact assessments (EIA), audits and monitoring (VI); Environmental audit and monitoring (VII); Environmental quality standards. The last five parts of the Act regulate on enforcement of provisions outlined in the Act and recognition of international agreements along which the EMC (amendment) Act 2015 has been established. They are; (VIII); Environmental Restoration orders, Environmental Easements (IX); Inspection, analysis and records (IX); Inspection Analysis and Records (X); International Treaties, Conventions and Agreements (XI) National Environment Tribunal (XII); Environmental Offences (XIII).

All the chapters 1 to 13 apply to the proposed project at one stage or the other and therefore the project proponent is required to understand and conform with the Act accordingly. One such area is Environmental and Socio Impact Assessment. This is expressly stated in section 58(2) of the Act.

3.3.3 The Environmental (Impact Assessment and Audit) Regulations, 2003/Legal Notice 31 & 32

This is a supplementary legislation to the EMC Act (amendment). It gives additional punch by providing guidelines for conducting Environmental Impact Assessments and Audits. It offers guidance on the fundamental aspects on which emphasis must be laid during field study and outlines the nature and structure of Environmental Impact Assessments and Audit reports. The legislation further explains the legal consequences of partial or non-compliance to the provisions of the Act.

The Legal Notice 31 &32 categorizes the proposed project as a medium risk one that requires a Comprehensive Project Report (CPR). This implies undertaking a detailed assessment of site conditions, public participation and broad stakeholder engagement.

3.3.4 Environmental Management and Coordination (Conservation of Biological Diversity) Regulations 2006

These regulations are described in Legal Notice No. 160 of the Kenya Gazette Supplement No. 84 of December 2006. These Regulations apply to conservation of biodiversity that includes Conservation of threatened species, inventory and monitoring of biological diversity and protection of environmentally significant areas, access to genetic resources, benefit sharing and offences and penalties. This legislation takes cognizance of the need to promote the integrity of biodiversity to promote their integrity. Most of the biological diversity is highly threatened by development in the current world and there is an apparent need to enhance their integrity. Section IV, prohibits any activity, which may have adverse effects on the ecosystem.

The proposed sites are not within any sensitive ecosystem. The vegetation on site is well documented. Any clearance that must be done will require a permit.

3.3.5 Environmental Management and Coordination (Wetlands, Riverbanks, Lake Shores and Sea Shore Management) Regulations 2009

These regulations provide for the protection, management of wetlands, riverbanks and lakeshores, seashore management.

3.3.6 Environmental Management and Co-ordination (Controlled Substances) Regulations, 2007

These Regulations aim to regulate the production, trade and use of controlled substances and products; provide for a system of data collection to facilitate compliance with relevant reporting requirements under the Montreal Protocol on Substances that Deplete the Ozone Layer; promote the use of ozone friendly substances, products, equipment and technology; and ensure the elimination of substances and products that deplete the ozone layer.

3.3.7 Environmental Management and Co-ordination (Waste Management) Regulations, 2006

Regulations guiding waste management are described in Legal Notice No. 121 of the Kenya Gazette Supplement No. 69 of September 2006. They offer legal provisions on handling of a variety of wastes emanating from various projects and activities. The waste categories covered by the regulations include:

- Industrial waste
- Hazardous and toxic wastes
- Pesticides and toxic substances
- Biomedical wastes
- Radio-active substances

These Regulations outline requirements for handling, storing, transporting, and treatment / disposal of all waste categories as provided therein. Part V section 34 requires that pesticides or toxic substances be disposed at designated site or plant approved by the authority.

The contractor & IWASCO will engage a licensed waste collector to handle waste generated during construction and operation respectively

3.3.8 Environmental Management and Coordination (Fossil Fuel Emission Control) Regulations 2006

These regulations are described in Legal Notice No. 131 of the Kenya Gazette Supplement No. 74 of October 2006 and will apply to all internal combustion engine emission standards, emission inspections, the power of emission inspectors, fuel catalysts, licensing to treat fuel, cost of clearing pollution and partnerships to control fossil fuel emissions.

3.3.9 Environmental Management and Coordination Act (Noise and Excessive Vibration Pollution) Control Regulations, 2009

This is covered under the legal notice number 61. These Regulations under part II section 3 prohibit making or causing any loud, unreasonable, unnecessary or unusual noise, which annoys, disturbs, injures or endangers the comfort, repose, health or safety of others and the environment.

Section 4 prohibits excessive vibrations and excessive vibrations which annoy, disturb, injure or endanger the comfort, repose, health or safety of others and the environment; or excessive vibrations which exceed 0.5 centimetres per second beyond any source property boundary or30 meters from any moving source;

Operations of machineries that produce excessive noise are also prohibited under section 11 including; Operating or repair of any machinery, motor vehicle, construction equipment or other equipment, pump, fan, air-conditioning apparatus or similar mechanical device; or engaging in any commercial or industrial activity, which is likely to emit noise or excessive vibrations that exceed the levels prescribed in the First Schedule (See annex) to these Regulations.

The legal notice also prohibit construction at night except for the purposes specified in sub-Regulation (2) which include roads and other public utilities. Section 15 calls for an Environmental Impact Assessment to be carried out by any person intending to carryout construction, demolition, mining or quarrying work to do an Environmental Impact Assessment studies to identify natural resources, land uses or activities which may be affected by noise or excessive vibrations from the construction, demolition, mining or quarrying;

Determine the measures that are needed in the plans and specifications to minimize or eliminate adverse construction, demolition, mining or quarrying noise or vibration impacts; and incorporate the needed abatement measures in the plans and specifications.

3.3.10 Isiolo County Climate Fund Act, 2018

The Isiolo Climate Fund Act of 2018 signifies a pivotal step taken by the County Assembly of Isiolo to confront the challenges posed by climate change within their jurisdiction. This legislation establishes the Isiolo Climate Change Fund with the primary goal of financing, facilitating, and coordinating projects aimed at both adapting to and mitigating the effects of climate change. By earmarking financial resources specifically for climate-related initiatives, the fund aims to support activities such as resilient infrastructure development, drought-resistant agriculture, and renewable energy projects. Moreover, the Act seeks to streamline the implementation of these projects by fostering collaboration among government bodies, non-governmental organizations, and local communities. It also emphasizes the importance of effective financial coordination to optimize resource allocation and avoid duplication of efforts. With provisions for governance structures and accountability mechanisms, the Act ensures transparency in fund management and monitors the impact of funded projects.

The Isiolo Climate Fund Act of 2018 holds significant implications for water supply and sanitation within Isiolo County, particularly in the context of climate change adaptation and mitigation. As climate change intensifies, the availability and quality of water resources become increasingly uncertain, affecting both rural and urban communities. The establishment of the Isiolo Climate Change Fund provides a structured mechanism to address these challenges.

Firstly, the fund can support projects aimed at improving water supply infrastructure to ensure reliable access to clean water. This includes initiatives such as drilling boreholes, constructing water storage facilities, and implementing water treatment technologies that are resilient to climate variability. Secondly, the Act facilitates investments in sanitation infrastructure to enhance public health and hygiene standards. Improved sanitation facilities, including eco-friendly toilets and wastewater treatment systems, can mitigate environmental pollution and reduce health risks exacerbated by climate impacts. Furthermore, the Act encourages the adoption of sustainable water management practices. This may involve promoting water conservation techniques, such as rainwater harvesting and efficient irrigation methods, to optimize water use in agriculture and household consumption.

By coordinating financing and fostering collaboration among stakeholders, including government agencies, NGOs, and local communities, the Isiolo Climate Fund ensures

that water supply and sanitation projects are implemented effectively. The Act's governance structures and accountability mechanisms also ensure transparent management of funds and evaluation of project outcomes, thereby enhancing the resilience of Isiolo County's water resources to climate change impacts. In essence, the Isiolo Climate Fund Act of 2018 not only aims to finance and facilitate climate change adaptation and mitigation projects broadly but also specifically addresses critical issues related to water supply and sanitation.


IWASCO can leverage on this fund particularly the component of solarization.

4 BASELINE CONDITIONS

4.1 Physical Characteristics

Location and Coordinates

Tullu Roba Borehole Site is located on Acacia Sub-location, Tullu Roba Location, Isiolo Central Sub-county, Isiolo County. The geographic location of the site is latitude 0.37101470 North, longitude 37.59500 East and elevation of approximately 1074 meters above sea level. The site is securely enclosed by a live fence and chain link, ensuring controlled access and security. The Tullu Roba Borehole site spans a quarter-acre at Al Rahim mosque, offering a well-defined area dedicated to water access and management.

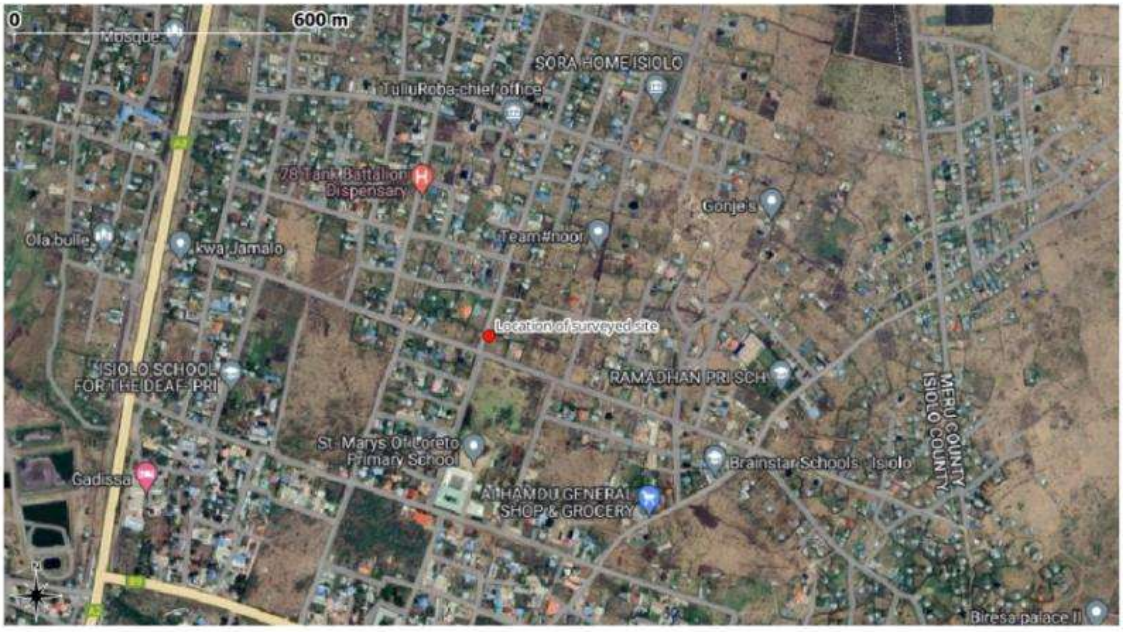

Google Map extract showing the location of the project

Existing Structures

The Tullu Roba Borehole site is not only a crucial water resource but also a hub of community life, featuring a mosque and class rooms. The mosque on-site serves as a vital place of worship, providing spiritual guidance and a communal space for local residents to gather, pray, and hold religious events.

Vegetation

The current state of the Tullu Roba Borehole site is bare landscape, devoid of any vegetation. This absence of plant life underscores the harsh environmental conditions typical of the region, where water scarcity and arid soil make it difficult for vegetation to thrive. The lack of greenery gives the site a rugged appearance, highlighting the critical importance of the borehole as a source of life-sustaining water in an otherwise barren environment.

4.2 Topography


The relief and physiography of proposed site is characterized by a relatively flat terrain. The area is part of the Isiolo River basin. It has an elevation of approximately 1055.42 meters above sea level.

4.2.1 Drainage and Land Use

The drainage type of Isiolo town is primarily influenced by the Isiolo River and the Ewaso Ng'iro River, which has variable drainage from the headwaters at Mount Kenya. The site is not drained by any river, stream or wetland. The dominant land use in the project area is commercial (isiolo Town centre), public utility use, institutional and residential. The project is consistent with the existing land uses. It is a service infrastructure development.

4.2.2 Geology

According to the hydrogeological survey report, the geology of the area is composed of trachyte, basalt and pyroclastics. Trachyte is a fine-grained and generally light-coloured volcanic rock that usually has a rough surface to the touch. It is an extrusive rock, belonging to the alkali series of intermediate volcanic rocks. The major mineral component of trachyte is alkali feldspar (e.g. orthoclase), and it generally contains no quartz. Trachyte often displays trachytic texture, where acicular to tabular feldspar phenocrysts align in one direction, suggestive of flow prior to cooling. Trachyte lava is of moderate viscosity and forms thick lava flows and domes. Basalt is a common rose-coloured volcanic rock composed of calcic plagioclase (usually labradorite), clinopyroxene (augite) and iron ore (titaniferous magnetite). Basalt may also contain olivine, quartz, hornblende, nepheline, orthopyroxene, etc. Basalt is a volcanic equivalent of gabbro. Basalt is usually black or dark grey and relatively featureless. It is composed of mineral grains which are mostly indistinguishable to the naked eye. Basalt may also contain volcanic glass. Basalt may contain phenocrysts (larger crystals within fine-grained groundmass) and vesicules (holes that were filled by volcanic gases). Pyroclasts (or "tephra') are any volcanic fragment that was hurled through the air by volcanic activity. A pyroclastic deposit is the resulting layer or pile of material that has fallen to the ground by one or many pyroclastic eruptions. A pyroclastic rock is the hardened, solidified, or compressed version of an originally loose pyroclastic deposit.

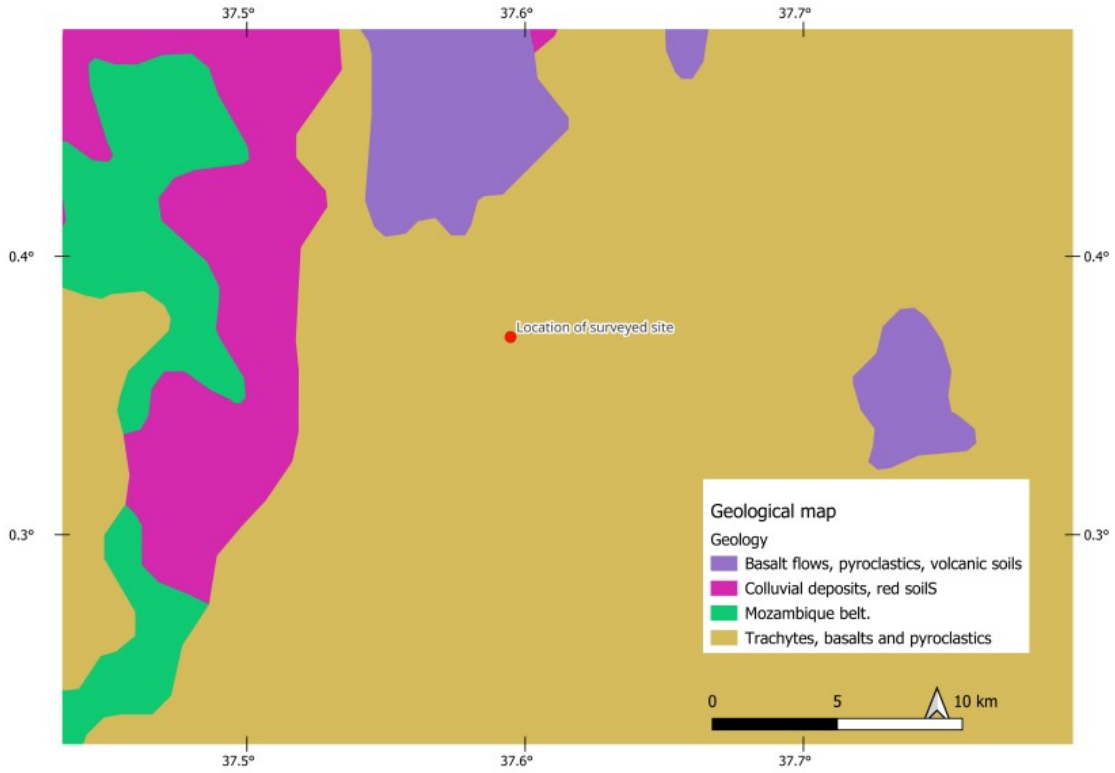

Map extract of geology of the area

4.2.3 Climatic conditions

(i)Rainfall

The rainfall patterns in the wider Isiolo Town is characterized by distinct wet and dry seasons, with temperatures varying throughout the year. The town experiences a semi-arid climate, with an average annual rainfall ranging between 300 and 500 millimeters. The primary sources of precipitation are the short rains from October to December and the long rains from March to May. The town's rainfall pattern is characterized by low and erratic precipitation. The dry season, extending from June to September, experiences minimal rainfall, contributing to water scarcity and challenging agricultural practices.

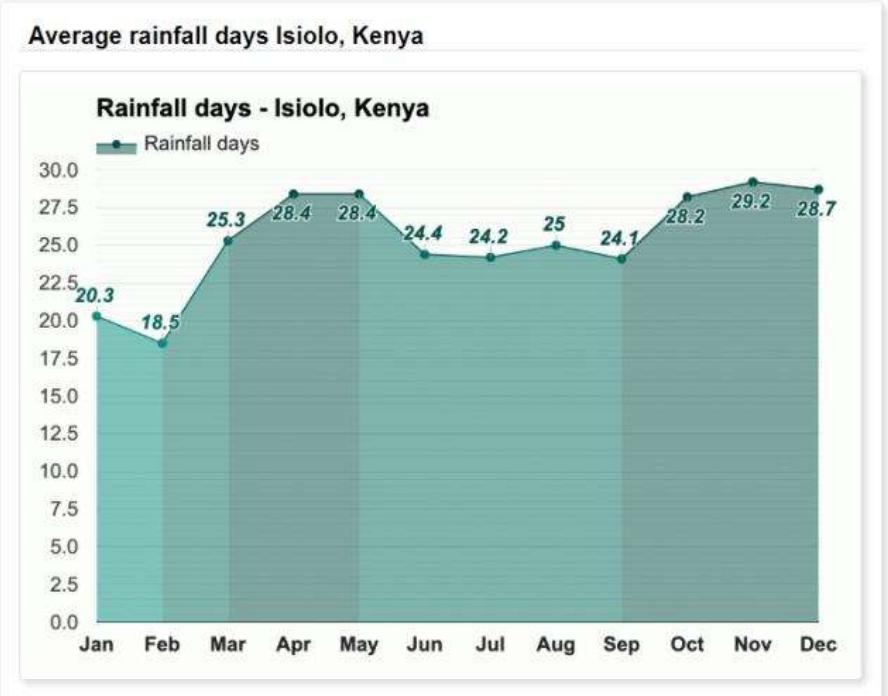


Figure 4-1: Average Rainfall in Isiolo Town

Kenya Meteorological Department, Isiolo Town, 2024

(ii)Temperature

Isiolo Town, where the project is located generally has high temperatures, especially during the dry season. The average annual temperature ranges from 20°C to 32°C. Daytime temperatures can exceed 35°C during the hottest months, contributing to the arid conditions of the region. Night time temperatures tend to be cooler, with lows ranging from 10°C to 20°C. It records more than nine hours of sunshine per day and has a huge potential for harvesting and utilization of solar energy.

With more than nine hours of sunshine per day, the town has abundant solar energy potential. Solar energy can be harnessed through photovoltaic panels to generate electricity. Solar-powered water pumping systems can be installed to extract groundwater for irrigation and domestic use. IWASCO is seeking to utilize this resource to minimize maintenance cost.

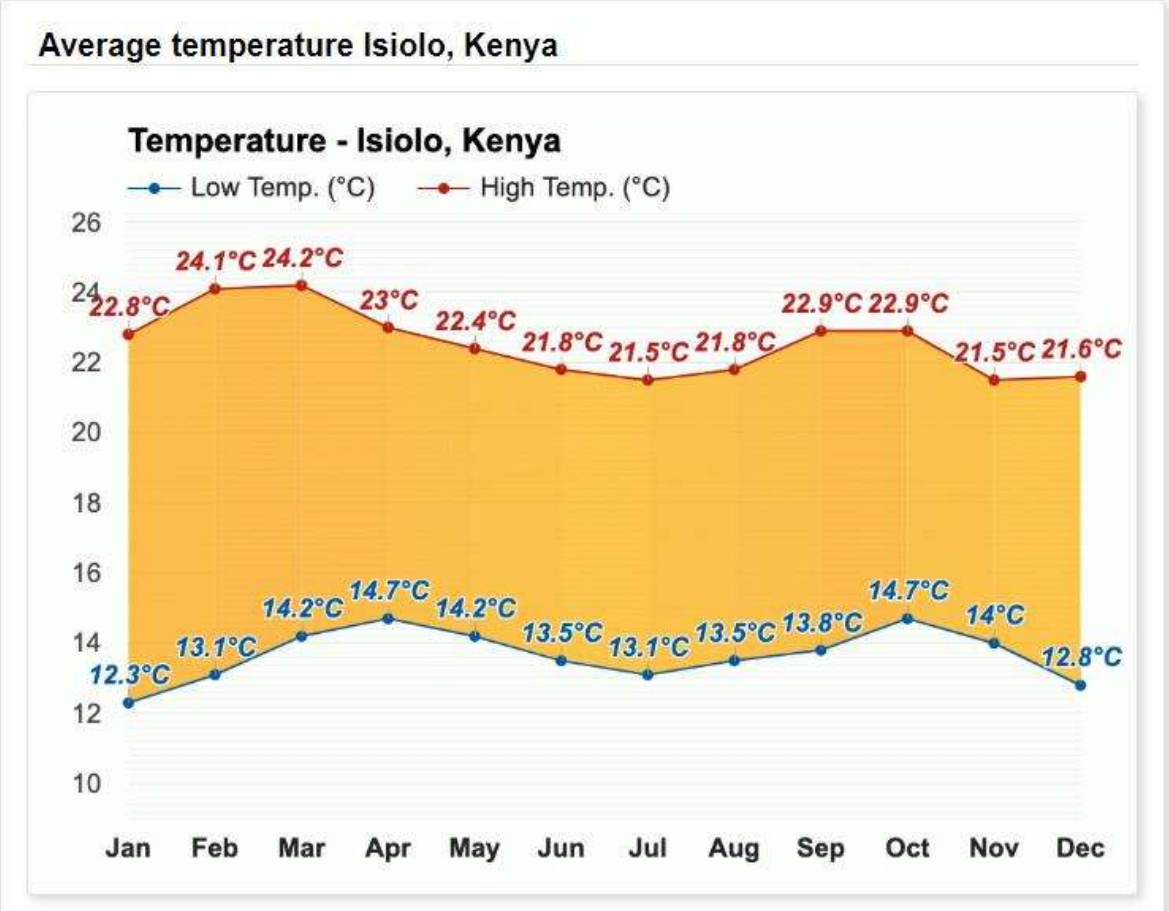


Figure 4-2: Average Temperature Isiolo Town
Kenya Meteorological Department Isiolo Town, 2024

4.2.4 Ecological characteristics

Flora

The proposed site is characterized by scattered grass and short shrubs. There are shrubs are minimally scattered across the field. The most common shrubs on site that those of acacia- Commiphora Species. Bush clearing will be done to allow for borehole drilling. The contractor will be required to restore the site upon completion with vegetation and trees adapted to the area.

Fauna

The project area is within a typical urban residential area with no wildlife habitat. It is not a wildlife corridor.

4.2.5 Socio-Economic Activities

Population

According to the 2019 Population and Housing Census, Isiolo County had a population of 268,002. The county's average growth rate from 2009 to 2019 stood at approximately 2.8%, exceeding the national average of 2.2%. This growth can be attributed to demographic shifts including in-migration, rising fertility rates, low mortality rates, and increased life expectancy. By 2027, the projected population is expected to exceed the current KNBS estimate of 345,871. The population is predominantly composed of Cushite communities such as the Oromo, Boran, and Sakuye, as well as the Turkana, Samburu, Meru, Somali, and other groups migrating from various regions within the country. The majority of these communities, approximately 59%, live in rural areas.

As the population grows, particularly in Isiolo town, due to in-migration, there is a higher demand for clean water. This places strain on existing water supply infrastructure and resources.

Table 4.1: Population Distribution in Isiolo County

Sub County	Male	Female	Intersex	Total
Garbatulla	54661	45068	0	99,729
Isiolo	60414	60647	0	121,061
Merti	24435	22768	9	47,212
Total	139510	128483	9	268002

Source: KNBS, 2019

Population for Isiolo sub-county wards

As highlighted below Tullu Roba is located in Isiolo Sub-county-(East Ward)

Wards	Population
Garbatulla	36301
Kina	27216
Sericho	36213
Central	56065
East	37439
Ngaremara	7425
Oldonyiro	20137

Cherab	27246
Kom	7665
Merti	12295
TOTAL	268002

Population as per Isiolo sub-county wards

KNBS, 2019

4.2.6 Socio Economic Profile of Residents in project Area

(i). Introduction

A household survey was done through questionnaire administration targeting project beneficiaries who are connected to IWASCO water or fetch water from the identified borehole sites. The consultant used a sample of 5% of the targeted population. According to Cochran (1977), for household surveys a sample size of 5% is satisfactory provided it is truly representative of the whole. Kothari (2004) argues that if the sample is random and large enough approximately 5% of the total population can still provide reliable estimates and valid inferences about the population parameters. It is therefore notable that the most critical factor in sampling is not the size but the study design.

In this survey, the consultant adopted a multi -level sampling design which entailed clustering the project area into villages followed by selection of respondents randomly within the clusters. The expected household beneficiaries in Tullu Roba borehole project are 400 covering Tullu Roba, Kambi Juu, Kambi Garba and Mosque area villages. This formed the sampling frame (N). A total of 15 households were sampled. Each village was allocated 25% of the total sample size. Respondents were selected randomly within the village. The responses are discussed in this section.

(ii).Demographic Factors

Gender

The respondents comprised 70 % females and 30% males. Incorporating women in surveys and planning is integral given their household water management burden. Improved water access through this project can significantly improve women's water security, sanitation, health, and family duties. Understanding concerns via inclusive consultation will enable accommodative, gender-sensitive design - upholding equitable community development.

Age Group

The majority of the household head are in the age bracket of (26-35years) and (36-45years). 15% are below 25 years while another 15% are above 56 years. This represents a youthful population which is consistent with the population pyramid of

most urban areas. As such, water access is of significant importance not just for domestic use but as an economic enabler.

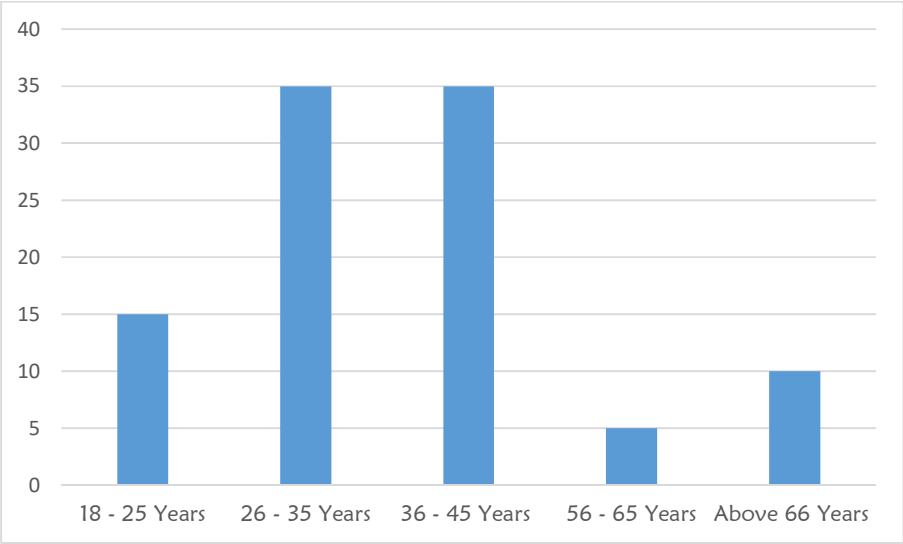


Figure 4-3: Age distribution in Tullu Roba

Household Members (Adults)

95% of the respondents have less than 5 adults in their households while 5% have more than 5 adults.This population is relatively low compared to the average household population in the Northern region of Kenya. This could be due to the prevalence of a youthful population who have young families.

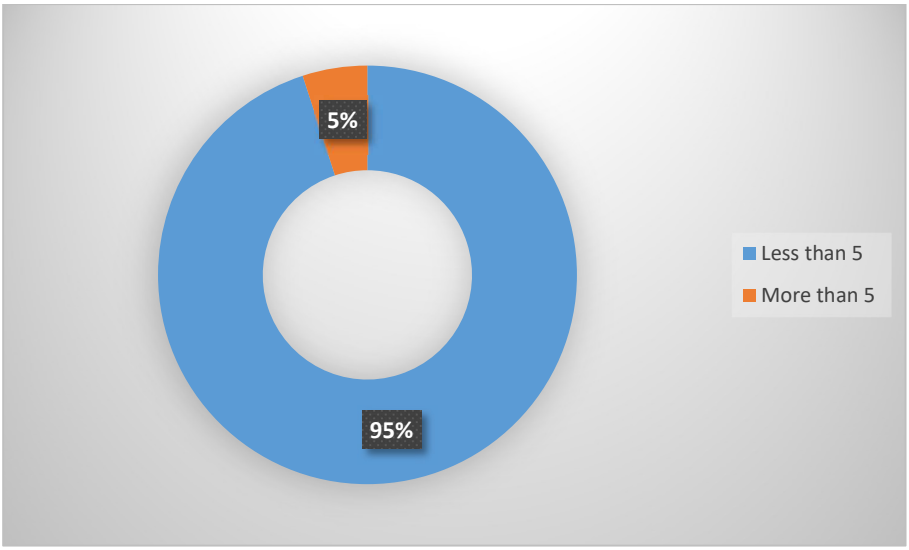


Figure 4-4: Household size

(iii). Education

95% of the respondents can read and write while 5% indicated that they can not read or write. This is a notable high level of literacy particularly in the Northern region where majority are illiterate. This level of literacy will facilitate sensitization and awareness creation on the proposed project.

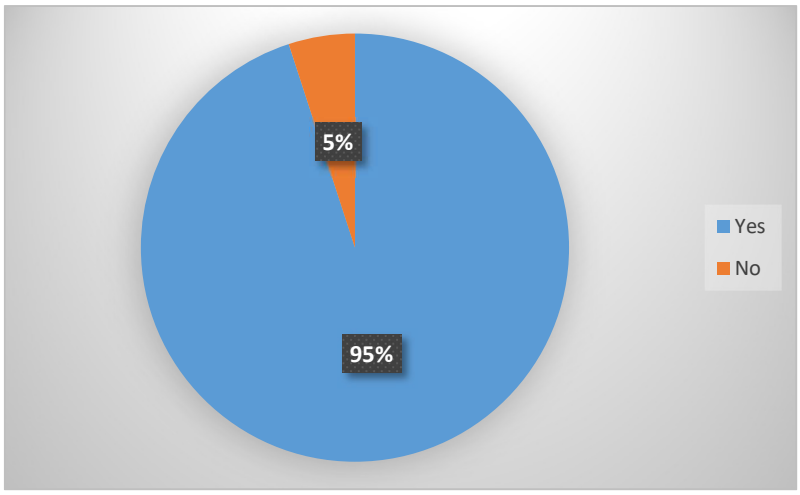


Figure 4-5: Ability to read and write

(iv). Main Source of Income

The occupational landscape in Tullu Roba is diverse. Pastoralism is the most predominant source of income for majority of the households (38%). 24% derive their livelihood from businesses. Others are employment, hairdressing, tailoring and mixed farming. Most of these activities will benefit from improved water supply.

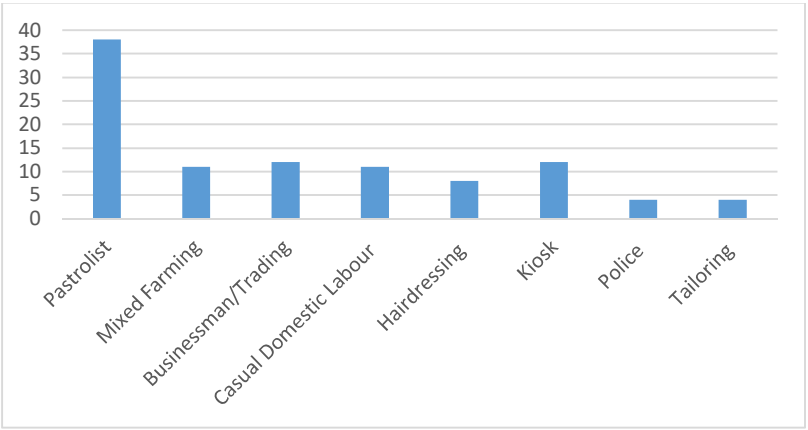


Figure 4-6: Main source of income

(v). Length of Stay in Project Area

40% of the residents have lived in the area between 6-12 months. Equal proportions (20%) of respondents have lived in their dwellings for 1-5 years and 5-10 years. 15% have lived in the area for more than 10 years. A smaller percentage (5%) have resided for less than 6 months.

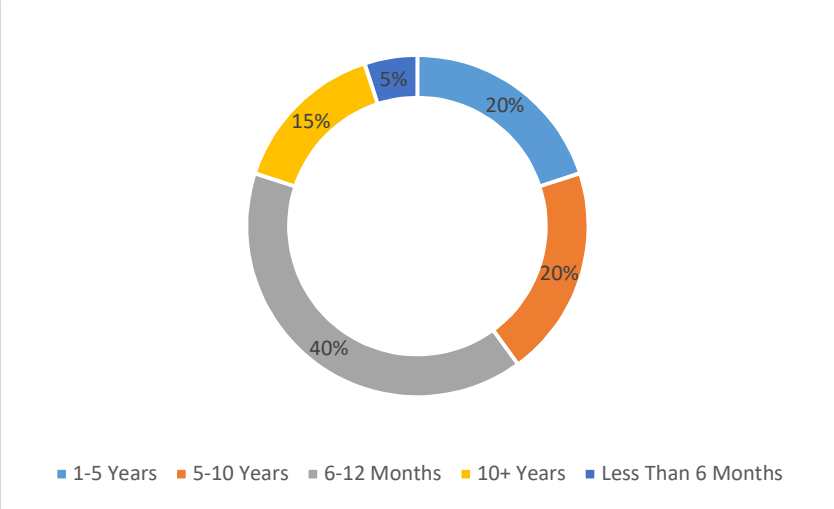


Figure 4-7: Duration of Stay in the Household

(vi). Housing Tenure

Majority of the residents own the houses they live in (95%) compared to 5% who are tenants. This ownership pattern suggests a population likely to be receptive to long-term infrastructure improvements. The high rate of personal ownership could facilitate easier implementation of household connections.

Sources of Energy

Charcoal is the most common source of fuel in the area (45%) which could be attributed to its availability and affordability compared to other sources. LPG is also widely used by 23% and of the households. There is a significant number of residents who have adopted energy saving fuel -charcoal briquettes (9%). This reliance on biomass fuels indicates potential environmental and health concerns.

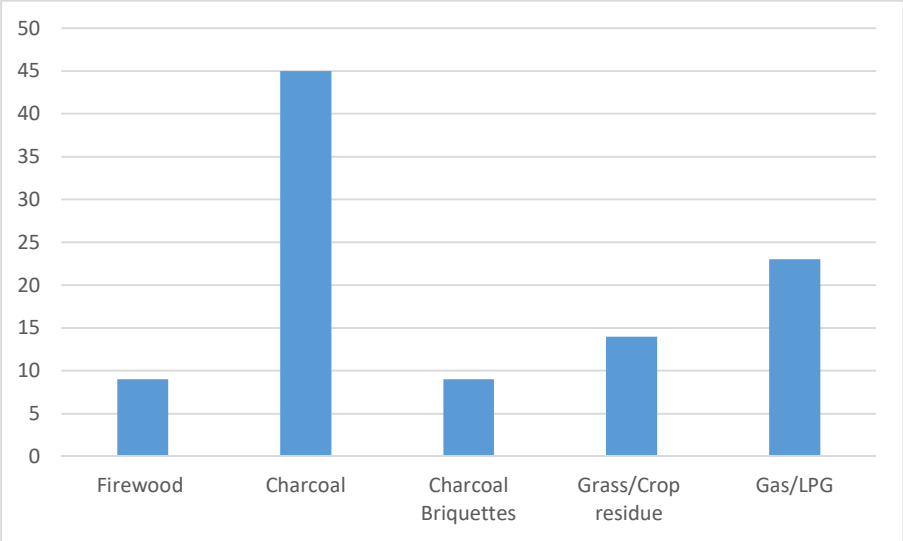


Figure 4-8: Sources of Energy for cooking

Sources of Drinking Water

55% of the respondent's main source of drinking water is a tap outside the house, 40% is pump/borehole and 5% is tap inside the house.

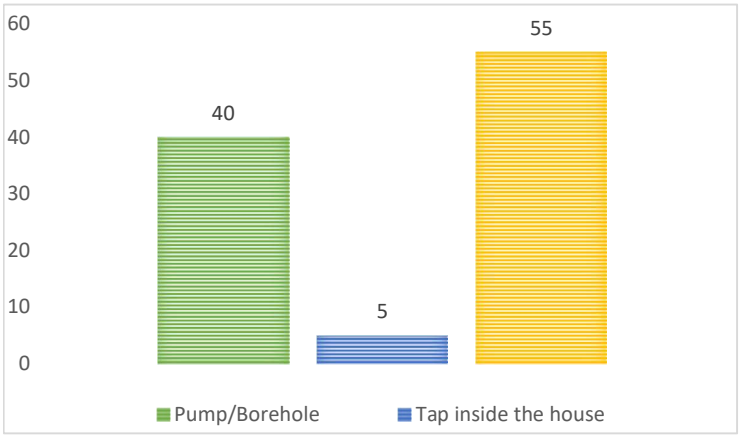


Figure 4-9: Sources of drinking water

45% of the respondents travel for less than 1 Km to the nearest water source; 30% travel between 1km-5km while 25 travel for more than 5 km to access water.

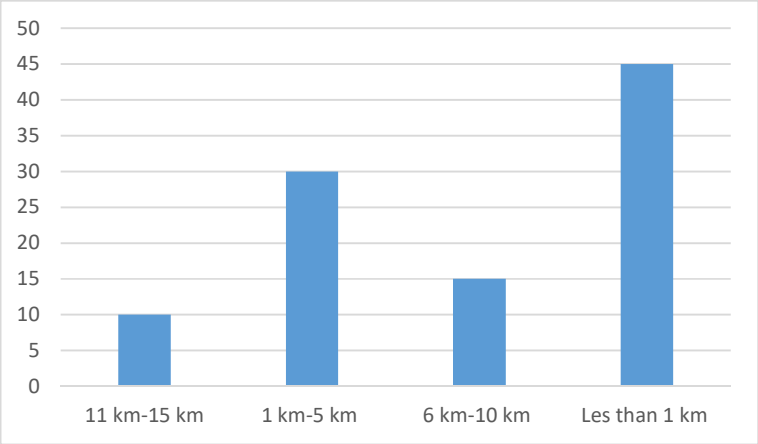


Figure 4-10: Distance travelled to access water.

The majority of the households spend between 0 – 15 minutes to the water source and back during the wet season.

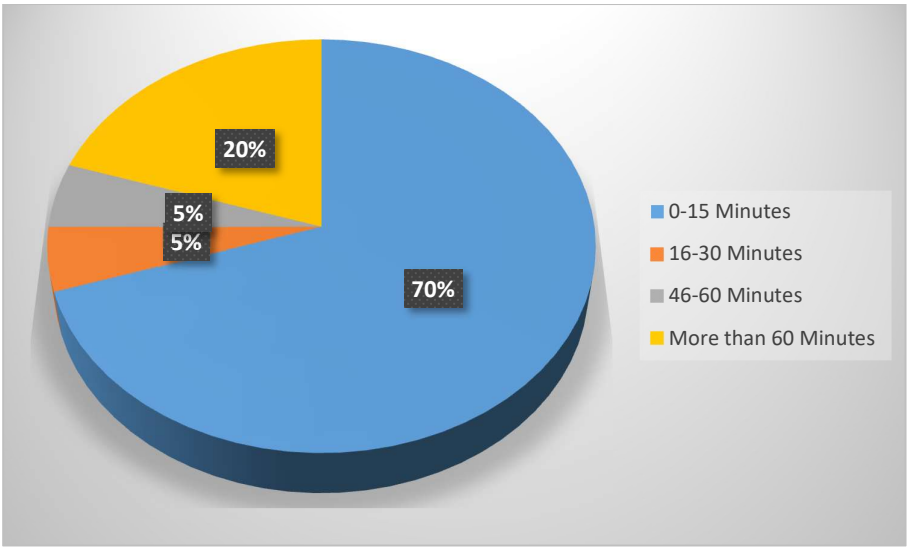


Figure 4-11: Time taken to water source

Sewerage Services

64% of residents are served by IWASCO (Isiolo Water and Sewerage Company) for water and sewerage services, while 36% report having no service provider.

Water Consumption

How many litres of water do you use per day?

80% of the residents consume less than 100 litres of water per day while 20% consume between 101 litres - 200 litres.

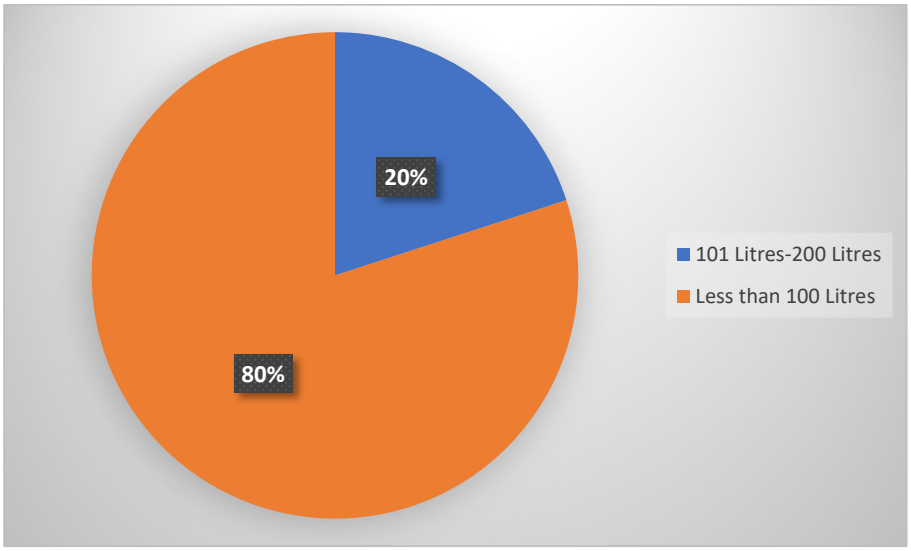


Figure 4-12: Water Consumption

Cost of water

The majority of the respondents (57%) pay between KES 100-500 monthly for the water they consume, 29% pay between KES 501-1000 while 14% pay between KES 1001-1500.

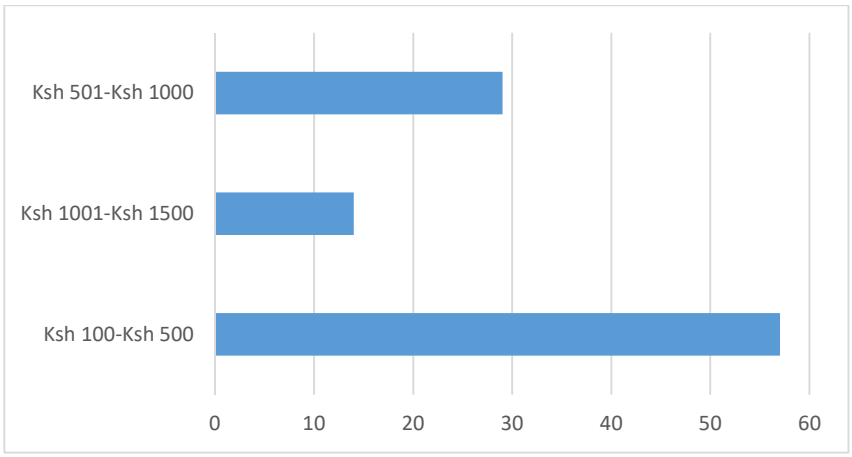


Figure 4-13:Cost of water

90% of the respondents want the current water supply changed or improved.

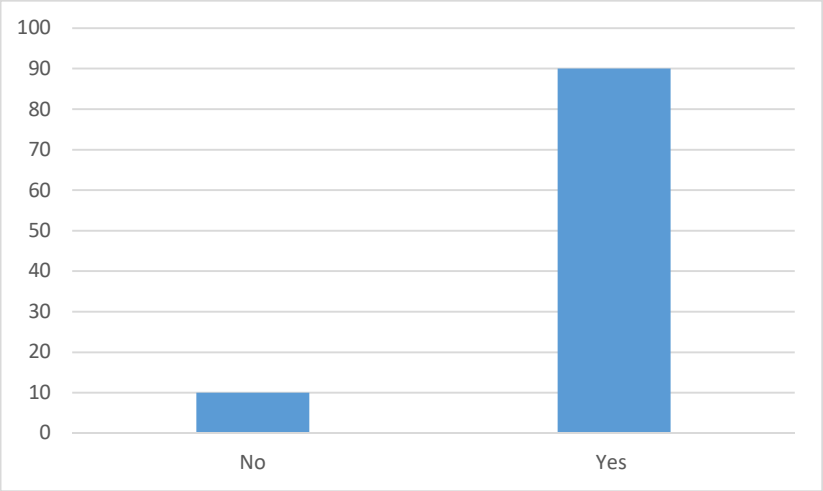


Figure 4-14: Do you want the current water service improved?

NGOs working in the area

The main NGOs working in the are WFP and Pastoralist Women for Health and Education (PWHE).

Cultural heritage/sites

The cultural heritage/sites existing in the area are distributed as 64% caves, 27% graves, and 9% ritual grounds.

Environmental Problems in the Area

The major environmental problems in the area are climate change, poor drainage, deforestation and waterborne diseases. Some of these challenges will be directly or indirectly addressed by the proposed project e.g. waterborne diseases that may be due to inadequate water supply.

Mitigation of environmental problems

Respondents mentioned that the prevailing environmental challenges can be mitigated through improving access to clean safe drinking water (34%) public education (22%) and tree planting (19%) among others.

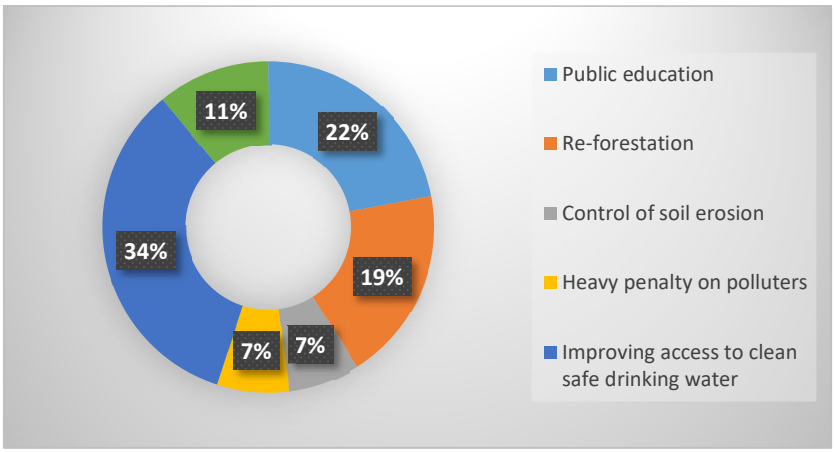


Figure 4-15:Mitigation measures

5 PUBLIC CONSULTATION AND STAKEHOLDER ENGAGEMENT

5.1 Introduction

Stakeholder engagement is a critical process in a project as it significantly influences the project's success. Stakeholders in this report refers to person (s) who has an interest or can either affect or be affected by the project. It is important to undertake effective consultation with stakeholders from the project inception to closure.

In this project, stakeholders were mapped out as either primary or secondary. They were then analysed based on their impact, level of influence, importance to the project, and contribution to the project. This helped in determining the best strategy for engaging with them. It then concludes with a summary of the feedback obtained from the stakeholders that is reviewed and incorporated in the final design, construction and operation of the project.

5.2 Objectives of Stakeholder Engagement

Stakeholder engagement has the following objectives:

- ***Inform***: Provide accurate, relevant, timely and culturally appropriate information to Project stakeholders about the Project, its impacts and benefits, and the ESIA process.
- ***Engage:*** Provide opportunities for Project stakeholders to express their opinions and concerns about the Project, and to seek broad stakeholder support for the Project and impact management
- ***Understand:*** Enable the Project team to understand the concerns and priorities of stakeholders
- ***Review***: Incorporate justified concerns and priorities into the design, construction and operation of the Project
- ***Inform (feedback):*** Provide feedback to Project stakeholders and host communities as the Project develops so that the consultation process continues.

5.3 Stakeholder Mapping

Mapping of stakeholders is an essential process that assists the expert in understanding whom they need to prioritize in their engagement. The following stakeholders have been identified as persons who will be affected by the project or who could influence the project's success. They are mapped as either:

a) **Primary Stakeholders-** Those who hold a direct interest in the proposed project
b) **Secondary Stakeholders-** Those with an indirect interest, but they can influence the project's success.

They are mapped as shown in the table below:

Table 5-1: Mapping of Stakeholders

Primary Stakeholders	Secondary Stakeholders
• Tullu Roba Mosque community where the borehole will be drilled • Isiolo Water & Sewerage Company (IWASCO) • Neighbours within project area • Client: Water Sector Trust Fund	County Government of Isiolo • Department of Water, Environment & Natural Resources National Government • National Government Administration • State Department of Gender & Social Services • State Department of Early Learning & Basic Education
	• National Environment Management Authority (NEMA) • Water Resource Authority (WRA) • Water Resources Users (WRUA) • NGOs / CBOs • Institutions within the area (Schools etc.)
	Political class • MCA • Ward Administrator
	National Government Administration • County Commissioner • Chiefs and their Assistants

5.4 Stakeholder Analysis

Table 5-2: Analysis of project stakeholders

Stakeholder Name	Impact *(Low, Medium, High)*	Influence *(Low, Medium, High)*	What is important to the stakeholder?	How could the stakeholder contribute to the project?	How could the stakeholder block the project?	Strategy for engaging the stakeholder
Water Sector Trust Fund	High	High	Grant administration to facilitate infrastructure development	By providing funds for undertaking the project	Withdrawing financial support for the project	Regular status report, monthly reports and other deliverables
IWASCO	High	Low	Obtaining water to supply to the public	Communicate with other stakeholders to express their support for the project	Ending their engagement with WSTF	Information and feedback meetings every 6 months
Tullu Roba Mosque	High	High	Understanding how the project safeguards their safety as the host community	By sharing their concerns, opinions about the project from the design stage.	Reject the project by refusing give up part of the land for the borehole drilling	Create project awareness and provide an open communication to ensure they understand the project well. Their engagement shall be

Stakeholder Name	Impact *(Low, Medium, High)*	Influence *(Low, Medium, High)*	What is important to the stakeholder?	How could the stakeholder contribute to the project?	How could the stakeholder block the project?	Strategy for engaging the stakeholder
						ongoing throughout the project cycle
County Government of Isiolo- Department of Water	High	Low	Ensuring consistent water supply needs in the county are met.	By sharing relevant information on proposed project with the Client/Consultant. Assist in the creation of project awareness and promoting acceptance	_____	Through KII and Focused Group Discussions. Consultant sharing their findings with the County.
NEMA	High	High	Adequate Environmental and Social Impact Assessment is undertaken before the project construction	By availing the ESIA report for review and licensing	By not issuing EIA License	Providing ESIA Report and all other necessary documentation regarding the project for review

Stakeholder Name	Impact *(Low, Medium, High)*	Influence *(Low, Medium, High)*	What is important to the stakeholder?	How could the stakeholder contribute to the project?	How could the stakeholder block the project?	Strategy for engaging the stakeholder
WRA	High	High	Proper management and use of water resources	By sharing relevant information of the water resources that will be affected by the project.	By not issuing permits required for water abstraction	Consulting with the stakeholder during the design stage and providing the relevant reports needed for issuing of permits.
Politicians (MCA, Ward Administrators, MP etc.)	Low	High	The residents within their area of jurisdiction access and enjoy amenities like water	Creating awareness about the project in order to obtain support and project acceptance	Inciting residents against the project	Involving them in focused group discussions and public stakeholder meetings
Local Administration (CC, DCC, ACC, Chiefs & Assistant Chiefs)	Low	High	Law and order are adhered to during the project implementation phases	Help in organization of local meetings, sharing relevant information about the project area, assist in identifying the affected land owners,	-	Involving them in KII, focused group discussions and public stakeholder meetings. Communicating all findings during each step of the project.

Stakeholder Name	Impact *(Low, Medium, High)*	Influence *(Low, Medium, High)*	What is important to the stakeholder?	How could the stakeholder contribute to the project?	How could the stakeholder block the project?	Strategy for engaging the stakeholder
				Help in resolution of any complaints that may arise during the project implementation phase.		Head the Grievance Redress committee once they are set up

5.5 Stakeholder Engagement Approach

Stakeholder engagement process is a crucial process in the undertaking of any project. The interaction is aimed at creating awareness, obtaining their views/opinions and concerns about the project.

Table 5-3: Methodology adopted in Stakeholder Engagement

Technique	Target Group	Objective	Date Undertaken
Key Stakeholder Interviews	Secondary Stakeholders County Government of Isiolo Department of Water, Environment & Natural Resources National Government National Government Administration State Department of Gender & Social Services State Department of Early Learning & Basic Education	• To create awareness about the project • To obtain their views regarding the project	12/6/2024-13/6/2024
Household Surveys	• Residents within the project area	• To understand the socio-economic status of the affected communities	12/6/2024-13/6/2024
Focused Group Discussion	Key stakeholders	• To obtain their input on the proposed design	12/6/2024
	Residents /Mosque community	• To create awareness • Establish consent • Obtain key project concerns	27/6/2024

5.6 Household Survey

A household survey was conducted to establish baseline conditions of the study area and to inform the residents on the proposed project. Baseline data was gathered from sample populations in Tullu Roba area through a detailed household questionnaire survey administered by research assistants. The survey examined key demographic statistics, socioeconomic conditions, water access, current sanitation methods, public health status, community issues, and awareness, as well as attitudes regarding the proposed project. Both quantitative and qualitative response metrics were collected across these indicators from a representative sample. A total of 15 households were sampled.

5.7 Focused Group Discussion

One focused group discussion was conducted at the village level (Tullu Roba area) and a baraza at the Sub County level (Isiolo) to collect indepth concerns regarding the proposed project. The FGD had a total of 23 participants out of whom 13 were men and 10 women. In attendance was the IWASCO staff (3) and WSTF consultant (2). The participants constituted religious leaders-including the Imam of Tullu Roba Mosque, Members of Tullu Roba Mosque, CBOs' leaders, women group leaders and youth representatives. These were selected by the area chief and the IWASCO sub area leader. A summary of the responses is presented is presented below. Minutes are annexed to this report.

Issues/Concerns raised in the FGD at the Tullu Roba Mosque

a) The community indicated that they welcome the project
b) It was noted that population in the area has grown rapidly and the water supply has remained constant
c) It was noted that IWASCO had been consistent in ensuring increased water supply and the community commended the company for these efforts
d) Will the borehole yield salty water unfit for human consumption? The water from the boreholes will be tested by Isiolo water company to ascertain its safety for human consumption.
e) How will be issue of clogging of pipes by dirty water be addressed? The water will also be subjected to water treatment including sedimentation to make it clean
f) Bore hole may interfere with ground water levels (water tables) A hydrogeological survey has been done and ascertained the water levels in the water table so as to get the place that will yield the highest amounts of water.



Plate 5-1: Focused group discussion at Tullu Roba Mosque

5.8 Summary of Feedback from the Public

The Consultant undertook public participation through a community public baraza held on 12/6/2024 to create awareness and solicit views and opinions on the proposed project. The community baraza was held at the Sub County level in Isiolo Town CDF Hall to collect indepth concerns regarding the proposed project. The participants were drawn from all the project sites namely: Checheles, Mater area, Mwangaza, Ramadhan, Show ground, Ewaso Comprehensive school and Tulluroba. The baraza had mixed participants drawn from the youth, Men and Women. The area leaders; nyumba kumi and religious leaders drawn from the Muslim and Christian community were also represented.

The IWASCO team introduced the project rationale and justification and the scope. The consultant provided a brief of the project Scope highlighting the importance of ESIA according to EMCA 1999 (Ammended 2015), the importance of public participation, upcoming field activities and importance of the community views. The chief gave the areas covered by the project and then there was a question and answer session. They community members indicated they have suffered water shortages for so long and were all supportive of the project stating that lack of water is a critical issue in the area. The issues that were raised in the baraza include:

5.8.1 Feedback from Public Baraza

- *Construction safety concerns::* is a critical concern particularly among the residents living around the proposed sites.
- *The boreholes may yield salty water unfit for human consumption*. The water from the boreholes will be tested by Isiolo water company to ascertain its safety for human consumption.
- *Water Quality*: The water will also be subjected to water treatment including sedimentation to make it clean.
- *Construction waste management:* All waste Materials and spoil will be disposed at NEMA approved sites
- *Ground water hydrology concerns:*. A hydrogeological survey has been done to ascertain the water levels in the water table so as to get the place that will yield the highest amounts of water.
- *Disposal of E-Waste*. The consultants assured the community that solar cells are just like the normal cells and are not associated with radioactivity.
- *Water Service Charge:* IWASCO confirmed to the community that the unit cost will remain the same but water supply will be improved

5.9 Key Informant Interview

Key informants were administered to institutional stakeholders using a key informant schedule from 12/6/2024-13/6/2024. The feedback is summarized below:

a) County Government of Isiolo- Department of Water & Sanitation
   - The office is aware of the project
   - The project will enhance water supply in a water scarce town
   - Increased water supply will spur other benefits -improved hygiene & health
   - Institutions can undertake other activities-e.g. promoting gardening
   - There is need to safeguard against water wastage to those who will be served by the proposed project
   - There is need to sensitize people on matters water recycling
   - There are no sensitive areas in the proposed project sites
   - Possibility of drilling borehole which yield saline water
   - Possibility of not yielding water
   - The need to treat water
   - The project will bear more benefits than negative impacts

b) County Government of Isiolo- Department of Social Development
   - The project will lead to increased access to water by the community
   - Improved hygiene & sanitation standards in the town

- The negative impacts include disruption of business along the pipelines
- Noise pollution during the drilling of borehole
- To mitigate against negative impacts there is need for involvement of the community during the project in order to find a middle ground especially for the business people who will be affected

c) State Department State Department of Early Learning & Basic Education

- The water will be useful to the school for multiple uses -drinking, watering seedlings but this will only be realized if there is no charge on the water
- There is an existing well which risk drying up
- There is need for a clear plan on how the school will benefit
- Consider a revenue sharing plan
- Ensure that the proposed project activities do not disrupt learning during construction, operation and monitoring

6 ANALYSIS OF ALTERNATIVES

6.1 Introduction

The Proposed borehole drilling and solarisation project is set to be implemented within Tullu Roba Mosque, Isiolo Town, Isiolo County. The pumping of water will be done using solar power which will minimize the cost of operation. This chapter analyses the different alternatives considered in selection of the borehole site and water source

6.2 The No Project Alternative

The no-action alternative is often defined by the baseline information and is crucial in the assessment of impact because other alternatives are weighed with reference to it. This alternative would mean that the project does not proceed.

The no project alternative option in respect to the proposed project implies that the status quo is maintained. This option is the most suitable alternative from the conservative environmental perspective as it ensures non-interference with the existing conditions. Under no project alternative, the proponent's proposal will not be implemented. This option will however, involve several losses both to the community and the county as a whole. Development of the project on the other hand will improve water provision to the residents of Isiolo.

The no project option will lead to the following (general) major negative and long-term impacts:

a) IWASCO would remain without regular water supply to provide to its consumers. The existing water sources that are not functional will also not be rehabilitated.
b) High operation costs due to electricity bills as result of pumping
c) Water shortage degrading their quality of health and sanitation
d) Stunted economic growth within the urban areas as a result of water shortage and high cost of water
e) Poor economic stimulation as a result of unemployment
f) Skills of the locals will remain underutilized
g) Increased time wastage as a result of travelling long distances to fetch water
h) Increased risk of water related conflicts
i) The proponent will not increase distribution in the service area

This scenario is not appropriate on either social or environmental grounds.

6.3 Location Option

The most suitable site selection for the boreholes took into consideration the following factors;

a) Geological and Hydrogeological Conditions:

Geological Survey: The subsurface geology indicates potential aquifers and formations suitable for groundwater extraction.

Hydrogeological Assessment: Preliminary hydrogeological conditions such as groundwater depth, quality, and flow direction indicate feasibility of groundwater extraction.

b) **Accessibility and Logistics:**

The selected sites are accessible for drilling equipment and logistics support. They are located in close proximity to the road and are all served with basic infrastructures such as electricity

c) **Environmental Considerations:**
The selected sites are not close to any environmentally sensitive ecosystem such as habitat or wetlands. In addition, the proponent has undertaken this ESIA to mitigate against any negative impact that the project may pose on the environment.

d) **Water Quality:**

The proposed sites are not near land uses that will pose a risk of contamination.

e) **Future Land Use:**

The site selection made consideration of current and future land uses to ensure land use changes will not affect borehole's operation or accessibility.

Based on these factors, two location options were considered: a mosque site and IWASCO-owned land. The proponent through the water line managers were tasked to establish a suitable location in Tulla Roba for development of a borehole. The community in Tulla Roba proposed Al Rahim community mosque which led to discussions and consultations among the mosque leaders. The leaders agreed to have the site used for the borehole project. It was agreed that the project would benefit the entire community through increased water flows and reduced intermittence.

Locating a borehole on Al Rahim Community Mosque land offers several advantages. The security of the borehole infrastructure would be enhanced by the fence surrounding the mosque compound hence reducing the risk of vandalism or theft. Additionally, placing the borehole on mosque land could foster a sense of community ownership, as the mosque is a central institution that might encourage local residents to safeguard this water source. The site's minimal environmental impact, characterized by scattered grass with no trees, would mean less disruption during installation. However, there are also

challenges to consider. The borehole's presence could interfere with mosque activities or events, particularly if maintenance work is noisy or requires significant space.

The second option involves acquisition of land by IWASCO. This will be under the full control and management of the IWASCO. However, it is costly and may have regulatory and administrative challenges that characterize land acquisition.

Given the level of funding available, the Al Rahim mosque land is preferred as it is more affordable and will not require lengthy acquisition processes. Residents of Isiolo will not have to wait for long to benefit from the increased water supply.

6.3.1 Water Source

The main sources of water in Isiolo are surface water from River Ewaso Nyiro and groundwater.

Surface water supply

1. **Reliability of Supply:**
    - Ewaso Nyiro river is one of the main potential water source in Isiolo County. Setting up water extraction from this river may require less initial investment in infrastructure compared to drilling and maintaining multiple boreholes.
    - However, due to the effects of climate change the river has become seasonal hence cannot provide a constant supply of water for a critical municipal function as the one proposed.
    - Additionally, extracting water from rivers can have environmental implications, such as altering downstream flows, affecting aquatic ecosystems, and potentially exacerbating water scarcity in dry seasons.

Borehole Water Supply:

- Boreholes in Isiolo town may yield a more consistent and potentially higher-quality water supply compared to Ewaso Nyiro River as it is less susceptible to seasonal variations.
- Boreholes offer a more reliable water source during droughts or dry seasons when rivers may have reduced flow or quality issues.
- Properly sited and managed boreholes have minimal impact on surface water resources and ecosystems, preserving local hydrological balances.
- Boreholes can be scaled according to local water demands, allowing for targeted water supply solutions that can adapt to changing community needs.

In consideration of the above factors, a borehole will be more favorable compared to surface water abstraction.

7 IMPACT IDENTIFICATION, ANALYSIS

7.1 Potential Impacts and Mitigation Measures

It is envisaged that the proposed borehole drilling & solarisation project will generate both positive and significant negative impacts during its life. The construction, operation and decommissioning phase are evaluated for both positive and negative impacts. Positive impacts should be enhanced through enhancement measures while negative impacts should be mitigated to reduce them.

In the assessment, the assessors have suggested measures to mitigate against the negative impacts, while enhancing the positive one. The proponents should continuously monitor the effectiveness of the mitigation or prevention measures recommended in the report. This is because these impacts are interlinked and any fault in one component will affect all the other phases of the project.

After the impact were identified and assessed, suitable mitigation measures have been defined to reduce or totally avoid the impacts. Mitigation measures were proposed based on national requirements, best practices, preliminary stakeholders' views, ESIA experts' advice, and according to the following mitigation hierarchy:

- ✓ avoid as much as possible;
- ✓ where avoidance is not possible, minimize following best practices;
- ✓ where minimization is not sufficient, mitigate through specific measures;
- ✓ where mitigation is not sufficient, compensate for residual risks and impacts.

7.1.1 Impact assessment scoring

To systematically identify, predict, evaluate and determine the significance of impacts resulting from the project construction and operation, generic criteria developed by Haug et al (1984) were adopted. Precautionary principle was used to establish the significance of impacts and their management and mitigation i.e. where there is uncertainty or insufficient information, the Environmentalist erred on the side of caution.

Table 7-1: Impact significance rating criteria

SEVERITY OF IMPACT	RATING	CONSEQUENCE
Insignificant / non-harmful / less beneficial	-1/ +1	
Small/ Potentially harmful / Potentially beneficial	-2/ +2	
Significant / slightly harmful / Significantly beneficial	-3/ +3	

Great/ harmful / beneficial	-4/ +4	
Disastrous/ extremely harmful / extremely beneficial	-5/+5	
DURATION OF IMPACT	RATING	
One day to one month	-1/ +1	
One month to one year	-2/ +2	
One year to ten years	-3/ +3	
Life of operation	-4/ +4	
Post closure	-5/+5	
SCOPE OF IMPACT	RATING	
Activity specific	-1/ +1	
Right of way specific (within right way)	-2/ +2	
Local area (within 5km of the project)	-3/ +3	
Regional	-4/ +4	
National	-5/+5	
FREQUENCY OF ACTIVITY / DURATION OF ACTIVITY	RATING	
Annually or less / low	-1/ +1	
6monthly / temporary	-2/ +2	
Monthly / infrequent	-3/ +3	
Weekly/ life operation/ regularly / likely	-4/ +4	
Daily / permanent / high	-5/+5	
FREQUENCY OF IMPACT	RATING	LIKELIHOOD

Almost never/ almost impossible	-1/ +1
Very seldom / highly unlikely	-2/ +2
Infrequent / unlikely/seldom	-3/ +3
Often / regularly/ likely/ possible	-4/ +4
Daily / highly likely/ definitely	-5/+5

Table 7-2: Significance rating matrix

CONSEQUENCE (Severity+ Spatial Scope + Duration)															
LIKELIHOOD (Frequency of activity + frequency of impact)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30
	3	6	9	12	15	18	21	24	27	30	33	36	39	42	45
	4	8	12	16	20	24	28	32	36	40	44	48	52	56	60
	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90
	7	14	21	28	35	42	49	56	63	70	77	84	91	98	105
	8	16	24	32	40	48	56	64	72	80	88	96	104	112	120
	9	18	27	36	45	54	63	72	81	90	99	108	117	126	135
	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150

Table 7-3: Mitigation ratings

Significance Ratings	Value	Negative Impact Management Recommendation	Positive Impact Management Recommendation
Very High	126-150	Improve proposed management	Maintain proposed management
High	101-125	Improve proposed	Maintain proposed

		management		management	
Medium – High	76-100	Improve management	proposed	Maintain management	proposed
Low - Medium	51-75	Maintain management	proposed	Improve management	proposed
Low	26-50	Maintain management	proposed	Improve management	proposed
Very low	1-25	Maintain management	proposed	Improve management	proposed

7.1.2 Construction Phase

7.1.1 Positive Impacts During Construction

The Proposed project could result into the following positive Impacts

a) Employment Opportunities: The construction phase will create job opportunities for local residents, particularly casual labour (approx. 10) but will vary based on the project phase e.g. more workers during well casing, securing site and excavation for pipelaying
b) Skill Development and Capacity Building: Workers involved in the construction phase receive training and develop skills related to construction and maintenance
c) Community Engagement and Awareness: The project can raise awareness about water management, construction practices, and community involvement.
d) Local business development: The project will promote local businesses through sourcing of construction Materials locally and other enterprises such as hotels
e) In some instances, there may be improvement of infrastructure around the site through negotiated CSR between the community and the contractor e.g. security lighting, water tank or sanitation facilities
f) Improved livelihoods in the area as money generated from increased businesses in the area

7.1.2 Negative Impacts During Construction

Land use restriction

The proposed project will not cause any form of displacement. However, sections of the land in the Tullu Roba Mosque compound where the borehole will be drilled will no longer be available for development or any other use.

Impact without Mitigation	
Severity of impact	-4
Spatial scope of impact	-1
Duration of impact	-1
Frequency of activity / duration of activity	-1
Frequency of impact	-1
Result	**-12 Very Low**

Mitigation measures

- Land use letters of agreements should be drawn with clear statements of tenure, management, access rights and benefits to the host
- The area to be utilized for the proposed works should be clearly stated in the agreement. Further it should be delineated in the presence of all the actors
- Ensure that the host community is aware of the proposed development and the anticipated benefits which they will gain from this development

Noise Pollution

Construction of the proposed Project will result in noise emissions as a result of the machines that will be used during drilling stage, setting up the solar panels and control rooms. Noise will also be generated from the construction workers. Noise will also be generated from the construction workers. The receptors of this impact are the host community where the proposed boreholes will be sunk. They include;

- ✓ Mosque community /worshippers
- ✓ Al Rahim Community Mosque Neighbouring residents within a radius of 100m
- ✓ Workers on site who will be involved in the drilling

Noise impacts would be considered significant if the Project would result in the following:

a) A substantial permanent increase in ambient noise levels (more than 3 dBA) in the project vicinity above levels existing before the project; and

b) A substantial temporary or periodic increase in ambient noise levels in the project vicinity above levels existing before the project.

Impact without Mitigation	
Severity of impact	-2
Spatial scope of impact	-1
Duration of impact	-1
Frequency of activity / duration of activity	-1

Frequency of impact	-1
Result	**-8 Very Low**

Mitigation measures

- Install portable barriers around drilling rigs and drilling bits to shield and reduce noise emissions. These barriers will help contain the noise at the source, minimizing its impact on nearby sensitive receptors like the mosque and and neighbouring residents.
- Limit the idling time of pickup trucks and other small equipment to reduce unnecessary noise. Implement a common-sense approach to vehicle use, encouraging workers to shut off vehicle engines whenever they are not in use.
- Ensure that noise levels during daytime do not exceed 55 dBA. Regular monitoring should be conducted to ensure compliance with this limit, thereby protecting the learners, teachers, worshipers and workers from excessive noise.
- Provide appropriate PPE, such as earplugs or earmuffs, to all workers on-site who will be exposed to high noise levels. This will help protect their hearing and overall well-being.
- Follow drilling protocols, including the use of barricades to secure the area. Notifications should be provided to the members of the Al Rahim community Mosque at Tullu Roba at least 14 days before the commencement of drilling activities, ensuring they are aware and can take necessary precautions.

(i). Site Safety, Security, and Welfare arrangements

The nature of the project brings into fore safety, security and health issues. These range from injuries from construction equipment or materials, poor hygiene etc. During solar installation, specific risks may include:

- ✓ Risks include electrical shocks from live wires and energized equipment
- ✓ Falls owing to the heights which solar panels are installed
- ✓ Workers may be exposed to extreme heat, leading to sunburn, thirst, and heat fatigue and may come in contact with hot objects like solar cells, which can cause burns

.

Impact without Mitigation	
Severity of impact	-5
Spatial scope of impact	-2
Duration of impact	-2
Frequency of activity / duration of activity	-2
Frequency of impact	-5
Result	**-63 low to medium**

Mitigation measures

- Barriers shall be erected to prevent unauthorized access to the project sites by residents, pupils and other persons
- Security personnel shall be deployed to secure the safety of the workers and property against vandals and to control access for safety purposes;
- The Contractor shall have his workers appropriately trained on safety and health matters-safety talks shall be held on a weekly basis;
- The contractor shall provide PPEs (reflector vests, hard hats and appropriate footwear) and ensure enforcement of the same
- The contractor will facilitate weekly inspection of lifting cables by a licensed expert
- Construction vehicles will observe the required speed limit of 50 KM/H within the residential areas
- Any accident, incident or hazardous situation should be reported immediately it occurs or identified;
- The Contractor shall ensure that any food served at the sites meets the minimum hygienic conditions;
- The contractor shall provide insurance cover for any eventuality during work to the employees;
- The proponent/contractor shall provide adequate and suitable sanitary facilities for workers during construction period;
- The Contractor shall deploy an EHS officer at the project 'site' to foresee implementation of the EHS and security matter; and
- The Contractor shall abide by the all the relevant provisions of OSHA, 2007 and other relevant legislations

For solar installation related risks the following measures should be taken:

- ✓ Ensure proper wiring with certified cables, secure grounding, and overcurrent devices
- ✓ Lockout/Tagout (LOTO) procedures should be in place to de-energize electrical circuits
- ✓ Use protective netting in elevated areas to prevent falls

(ii).Worker's welfare (hygiene and sanitation)

Welfare of the workers is crucial for a successful project. Both legal and moral standards require that workers are provided with adequate facilities that will guarantee safety and health. The Act (OSHA, 2007) obligates the employer to provide essentials facilities for sanitation water, accommodation for clothing, portable water supply, first aid facilities etc. Conversely, moral standards require that 'duty of care' be upheld in working situations to prevent injurious conditions.

Impact without Mitigation	
Severity of impact	-4
Spatial scope of impact	-2
Duration of impact	-2
Frequency of activity / duration of activity	-2
Frequency of impact	-2
Result	**-32 Low**

Mitigation measures

- The Contractor shall abide by the requirements under OSHA, 2007 in regard to the safety, health and welfare of the workers
- The contractors shall provide, free of charge, appropriate PPEs
- The Contractor shall provide clean portable drinking water for the workers
- The Contractor shall provide first-aid services
- Sanitation facilities for both sex including a hand washing facility;
- The Contractor shall communicate and implement the contents of the EHS policy of the Company to the employees
- The Contractor shall make available emergency services at the site/ camp;
- The Contractor shall retain a well trained and experienced EHS officer at the site

(iii). Effects on flora (plants/vegetation)

The proposed borehole site is located in area with minimal vegetation.

Impact without Mitigation	
Severity of impact	-5
Spatial scope of impact	-1
Duration of impact	-1
Frequency of activity / duration of activity	-1
Frequency of impact	-1
Result	**-14 Very low**

Mitigation measures

- The Contractor and other project participants must ensure minimal or no disturbance to existing vegetation by marking out access routes and construction area
- Where there is need to cut any mature tree, the contractor should obtain a permit from the department of environment in the county

- The project will make provision for tree planting within the site restoration activity

(iv). Water Quality

The selected site is not located near waterways hence there is minimal impact on surface water. In the case of ground water, there is a probability of water pollution during the drilling process. This may be caused by fuel leakages from equipment or vehicles and inappropriate disposal of wastes. Groundwater pollution may lead to health implications on the community.

Impact without Mitigation	
Severity of impact	-4
Spatial scope of impact	-2
Duration of impact	-1
Frequency of activity / duration of activity	-2
Frequency of impact	-3
Result	**-35 low**

Mitigation measures

- Locate storage areas and compounds away from the borehole site
- Designate an equipment servicing location away from the proposed site
- Appropriate storage of fuel and Materials on site
- The contractor should engage a licensed waste collector to manage all the wastes.
- Undertake water quality monitoring after construction to establish any contaminants in the water

(v). Pollution by Waste Water

Improper handling and disposal of wastewater generated during the drilling process can lead to severe consequences for both groundwater quality and the community. The water contains mud drillings and drill cuttings which pose a health hazard to livestock including causing gastrointestinal diseases and long-term chronic conditions due to exposure to toxic substances The contaminated water can introduce pollutants into aquifers posing health risks to communities relying on groundwater.

Impact without Mitigation	
Severity of impact	-5
Spatial scope of impact	-3

Duration of impact	-2
Frequency of activity / duration of activity	-2
Frequency of impact	-4
Result	**-60 Medium**

Mitigation measures

- Engage licensed waste company to handle all drilling wastes including waste water
- The contractor will ensure that all fuel and hazardous materials are stored securely away from the borehole site to prevent leaks.
- Establish designated areas for equipment servicing that are also distanced from the borehole location.
- Conduct regular water quality assessments post-drilling to detect any contaminants in the water
- Inform local communities about potential risks associated with borehole drilling

(vi). Impact on vulnerable and marginal groups

Borehole construction is a low impact project that may have minimal or no impact on the marginalized communities. However, if not managed properly, the construction may create a disproportionately heavy burden as they would experience challenges with blocked access routes.

Impact without Mitigation	
Severity of impact	-2
Spatial scope of impact	-1
Duration of impact	-1
Frequency of activity / duration of activity	-2
Frequency of impact	-2
Result	**-16 Very low**

Mitigation measures

- Create awareness to the community on the proposed project works to increase preparedness & readiness
- Construction Materials and debris should not be stored along access routes

- Construction vehicles should adhere to recommended speed limits in the sensitive zones
- The contractor should have a watering schedule along the access road and on site to minimise dust.

(vii). Project Related Conflicts

There may be issues that arise during project construction that need attention. This may range from employment issues, division of supply, project activities, duration of the construction period, engagement of host community etc.

Impact without Mitigation	
Severity of impact	-3
Spatial scope of impact	-3
Duration of impact	-2
Frequency of activity / duration of activity	-2
Frequency of impact	-1
Result	**-24 Very low**

Mitigation measures

- ✓ The project shall have in place a conflict/issues management strategy including engaging an EHS expert who will manage the project related conflicts
- ✓ All matters or issues that may arise during construction shall be documented and presented to the relevant persons-IWASCO, Contractor, Administration Officers
- ✓ Sensitive matters beyond control of the relevant persons or institutions shall be referred to the court of law.
- ✓ The Contractor shall ensure that locals are given first priority during recruitment of workers. Unskilled labour opportunities will be given to the locals
- ✓ In specialized tasks, the Contractor shall ensure that apprentices are from the local community to allow for skills transfers
- ✓ The contractor shall hold periodic meetings with community representatives and local administration to communicate the project plan, design and progress.

Grievances Redress during project construction

The proposed grievances mechanism will entail:

- ✓ Engagement of an EHS Expert by the contractor who will act as a liaison person and expert in management of conflicts arising from the project.

- ✓ Documentation of all issues or matters arising during the construction phase so as to allow for follow up by IWASCO and relevant stakeholders
- ✓ The Contractor will be required to prioritize local residents for recruitment, especially for unskilled labour positions.
- ✓ For specialized tasks, apprentices from the local community should be given opportunities, facilitating skills transfer and local capacity building.
- ✓ The Contractor is obligated to hold a meeting (at the inception) with community representatives and local administration. These meetings aim to communicate the project plan, design, and progress, ensuring transparency and continuous dialogue with the local community.

(viii). Politics and political good will

Intense and negative political influence is a recipe to collapse of many projects. Indulgence in political insinuations may lead to postpone or delay to project completion and implementation.

Impact without Mitigation	
Severity of impact	-2
Spatial scope of impact	-1
Duration of impact	-1
Frequency of activity / duration of activity	-2
Frequency of impact	-2
Result	**-16 Very low**

Mitigation measures

- The project will provide for extensive public participation
- The community shall be sensitized on negative political influence on projects implementation

The politicians shall be encouraged to support and give advice on the project sake of the community economic development

HIV/AIDS

Increased mobility of workers may lead to higher risks of HIV transmission if preventive measures are not implemented.

Impact Without Mitigation

Impact without Mitigation	
Severity of impact	-4
Spatial scope of impact	-1
Duration of impact	-1

Frequency of activity / duration of activity	-1
Frequency of impact	-1
Result	**-12 Very Low**

Mitigation Measures

- Ensure workers are trained on HIV/AIDS prevention, including safe practices and access to health services before and during the construction.
- HIV/AIDS talks can be included in the weekly safety talks that are proposed in other mitigation measures

Gender Based Violence and Sexual Exploitation and Abuse

Construction works may introduce migrant workers who may interact with the local community creating an avenue for sexual exploitation or abuse. This may also lead to gender- based violence due to the suspicions that may be created in families. Harassment within the workforce, particularly for women and youth laborers could arise.

Impact without Mitigation	
Severity of impact	-3
Spatial scope of impact	-1
Duration of impact	-1
Frequency of activity / duration of activity	-1
Frequency of impact	-1
Result	**-10 Very Low**

Mitigation Measure

- Enforce the environmental and social safeguards
- Include measures to control GBV-SEA-SH risks during project planning.
- All workers should attend a mandatory on code of conduct and sign the code of conduct.
- Awareness creation and community outreach to educate locals about their rights and available reporting mechanisms.

Child Labour

Direct child labour may be limited since drilling and solarisation is a specialised task. However a few casual positions such as carrying materials like sand, cement clearing

the site and waste bulking may attract child labour. Indirect child labour may occur when parents get engaged to work in the project and as a result leave their children to take over household activities leading to missing classes.

Impact without Mitigation	
Severity of impact	-4
Spatial scope of impact	-1
Duration of impact	-1
Frequency of activity / duration of activity	-1
Frequency of impact	-1
Result	**-12 Very Low**

Mitigation

- The contractor should adhere to the labour laws;
- The client should conduct regular inspections to ensure no children are working on-site.
- Using law enforcement agencies to monitor and apprehend those who contravene the laws.

Workers Influx

Borehole construction in comparison to a water piping project is a short term project that does not significantly lead to influx of workers in an area. Care should be taken when employing the unskilled workers making sure they are drawn from the community. If this is not observed, there could be conflicts and tensions, increased risk of sexual exploitation, harassment, or abuse. It could also lead to increased pressure on natural resources such as water, land, and firewood. Waste generation and improper disposal near construction sites.

Impact without Mitigation	
Severity of impact	-5
Spatial scope of impact	-1
Duration of impact	-1
Frequency of activity / duration of activity	-2
Frequency of impact	-1
Result	**-21 Very Low**

Mitigation

- Hiring of local workers for ease of management of workforce
- Enforcing the code of conduct for workers
- Frequent consultations with local leaders and community members when hiring the local workers
- Establish grievance redress mechanisms to address complaints and concerns

Conflicts over water access and management

With improved water supply , disputes concerning allocation of water especially priority areas, competition for water leading to conflicts between communities or households. Other disputes may arise from mismanagement, corruption and lack of enforcement of water regulations and favouritism and triggers conflicts including along ethnicity.

Impact without Mitigation	
Severity of impact	-5
Spatial scope of impact	-1
Duration of impact	-3
Frequency of activity / duration of activity	-1
Frequency of impact	-3
Result	**-36 Low**

Mitigation Measures

- Having a community driven Water Resources Users Associations committee
- Participatory decision-making involving all stakeholders benefiting from the borehole water.

7.1.3 Operational Phase

Positive Impacts During the Operation Phase

- Improved Access to Clean Water: Reliable and improved water supply systems will ensure consistent access to clean and safe drinking water.
- Enhanced Public Health and Hygiene: Increased access to clean water improves overall hygiene and sanitation standards.
- Support for Economic Development: A reliable water supply can support local businesses and agricultural activities.
- Environmental Benefits: Modern water supply systems often incorporate sustainable practices such as water conservation and recycling.

- Community Empowerment: Involvement in the operation and maintenance of water systems can foster a sense of ownership and responsibility within the community.

Negative Impacts During the Operation phase

(i). Vandalism and theft of installed infrastructure

Water utilities often experience theft from residents especially when the system is not functional/no water flow. These activities can affect the delivery and management of the installed system, which results to limited access in the town. They ranging from theft of pipes, fittings, and water through bypassing meters and tempering with connections.

Impact without Mitigation	
Severity of impact	-5
Spatial scope of impact	-3
Duration of impact	-2
Frequency of activity / duration of activity	-5
Frequency of impact	-1
Result	**-60 low to medium**

Mitigation measures

- The implementing agency to ensure good relationship with the local community through continuous engagement
- Foster household ownership of the infrastructure through payment of water by households
- Enforce law against reported cases of vandalism

(ii).Water quality

The project seeks to supply water for domestic use hence the need to ensure the water is of acceptable standards. Water supply may be subject to risks such as water contamination at source or during the reticulation. This may lead to waterborne illnesses and other health complications.

Impact without Mitigation	
Severity of impact	-5
Spatial scope of impact	-1
Duration of impact	-1
Frequency of activity / duration of activity	-1
Frequency of impact	-2
Result	**-21 Very low**

Mitigation Measures

- Provide for periodic water quality monitoring at strategic points including the source, WTP and along the distribution lines
- Use high-quality casing Materials and properly seal the annular space between the borehole wall and casing
- Install a screen in the borehole casing near the aquifer to filter out sediment and prevent entry of larger particles into the well
- Install a secure and sanitary wellhead to prevent surface water, insects, and debris from entering the borehole and potentially contaminating the water.
- Implement a regular monitoring program to assess water quality parameters such as pH, turbidity, total dissolved solids (TDS), microbial contamination (e.g., coliform bacteria), and chemical contaminants (e.g., nitrates, heavy metals)
- Maintain the borehole and pumping equipment regularly to prevent buildup of sediment, biofilms, and other sources of contamination that could affect water quality.
- Educate local communities on the importance of water quality protection, proper sanitation practices, and the potential sources of contamination that could impact their borehole water
- Develop an emergency response plan to address sudden water quality issues or contamination incidents including: protocols for water testing, notification of stakeholders, and remediation actions.
- Secure borehole area to prevent accidental or deliberate water contamination

(iii). Water Wastage and other losses

Increased water provision may lead to wastage of the scarce resource among beneficiaries. The system could also present inefficiencies that lead to water loss in the course of distribution. Stakeholders noted that the current system has high levels of unaccounted for water.

Impact without Mitigation	
Severity of impact	-3
Spatial scope of impact	-1
Duration of impact	-4
Frequency of activity / duration of activity	-5
Frequency of impact	-4
Result	**-72 Low to Medium**

Mitigation Measures

- The piping Material should be resistance to abrasions from external elements to prevent leakages
- Establish a monitoring system to allow for prompt detection of leakages and repairs
- Create awareness among project beneficiaries on the need to use water judiciously.
- Build the capacity of the water utility to continuously improve the efficiency of the water supply system including reduction of non-accounted water, installation of efficient technologies e.g. automated water points in water kiosks

(iv). Risk of Over abstraction

Increased water demand in the project area may result to water over abstraction. This can lead to lowering of water levels and eventually drying up of the same.

Impact without Mitigation	
Severity of impact	-5
Spatial scope of impact	-2
Duration of impact	-5
Frequency of activity / duration of activity	-5
Frequency of impact	-1
Result	**-72** Medium to High

Mitigation Measures

- Promoting efficient water use by use of water meters
- Create public awareness about efficient water appliances
- Establishing monitoring systems to promptly detect leakages and making repairs can help to conserve water.
- Implementing and enforcing regulations for water abstraction based on climatic data forecasts

(v). Climate change

Climatic changes in the area are manifested through unpredictable rains, intense floods, prolonged drought. Such extreme weather events may result to a reduction of groundwater and hence limited water supply or destruction of infrastructure in case of floods.

Impact without Mitigation	
Severity of impact	-5
Spatial scope of impact	-4

Duration of impact	-3
Frequency of activity / duration of activity	-5
Frequency of impact	-3
Result	**-96 medium - High**

Mitigation

- Climate proof all project infrastructure e.g. construct drainage channels
- IWASCO should integrate climate information applications in water supply scheduling

(vi). Energy Use

The proposed project will utilize solar power in pumping water from the borehole. This will enhance sustainability, low operation & maintenance cost. Additionally, it will promote adoption of green energy in the community and the county. Negative impacts may arise where the solar system fails to operate optimally due to changes in climatic conditions or technical failures. This may lead to disruption in water supply within the town.

Impact without Mitigation	
Severity of impact	-5
Spatial scope of impact	-1
Duration of impact	-1
Frequency of activity / duration of activity	-2
Frequency of impact	-2
Result	**-28 low**

Mitigation Measures

- Select high-quality solar panels, inverters, mounting structures, and other components from reputable manufacturers with proven track records.
- Hire certified and experienced solar installers who follow industry best practices and adhere to manufacturer guidelines for installation.
- Ensure the solar panels are kept clean and free of debris to maximize sunlight absorption.
- Regularly remove dirt, dust, bird droppings, and leaves that can reduce efficiency
- Periodically inspect and tighten electrical connections to prevent loose connections that can lead to system inefficiencies or failures.
- Install a monitoring system to track the performance of the solar panels, inverters, and overall system.

- Ensure all electrical components are properly weatherproofed and protected from rain, humidity, and extreme temperatures.
- Ensure proper charging and discharging cycles to prolong battery life
- Schedule periodic inspections by qualified technicians to check for wear and tear, corrosion, and other signs of potential problems.

(ix). Impact on vulnerable and marginal groups

Borehole construction is a low impact project that may have minimal or no impact on the marginalized communities. However, if not managed properly, the construction may create a disproportionately heavy burden as they would experience challenges with blocked access routes.

Impact without Mitigation	
Severity of impact	-2
Spatial scope of impact	-1
Duration of impact	-1
Frequency of activity / duration of activity	-2
Frequency of impact	-2
Result	**-16 Very low**

Mitigation Measures

- Involve vulnerable groups in all stages of borehole planning, construction, and management to ensure their needs and concerns are addressed.
- Ensure equitable access to borehole water by implementing transparent allocation mechanisms and considering the needs of vulnerable groups in water distribution plans.
- Implement pro poor water supply program to increase water access among the marginally poor groups in Isiolo town.
- Implement sustainable groundwater management practices to prevent over-extraction and ensure the long-term availability of water resources.
- Regularly monitor the impact of boreholes on vulnerable groups and adjust management practices accordingly to address emerging issues.

By taking these considerations into account and implementing appropriate measures, borehole construction and operation can contribute positively to the well-being and resilience of vulnerable communities, ensuring sustainable access to safe water and improving overall quality of life.

Influx of migrants

The establishment of temporary construction camps for the project workforce will lead to influx of migrants who may eventually settle in the project area. It is also anticipated that the promise of employment will draw residents from the neighbouring areas in search of work. The influx could result in secondary effects such as increased strain on social infrastructure such as schools and hospitals; there will also be a rise in petty crimes.

Impact Analysis

Impact without Mitigation	
Severity of impact	-2
Spatial scope of impact	-2
Duration of impact	-3
Frequency of activity / duration of activity	-3
Frequency of impact	-3
Result	**-42 Low**

Mitigation:

- Workers will be encouraged to abide by the set out company code of conduct while on duty to prevent risky interactions with community members;
- Workers will be transported to and from the construction site to limit unnecessary encounters with community members;
- The contractor will provide a communication forum with the local leaders, with women and youth groups to monitor any changes in social structure and population.

7.2 CUMULATIVE IMPACTS

Positive Cumulative impacts of the project:

a) Reduced costs of operation for the WSP: Solar-power use will reduce dependency on Kenya power energy which is a major operation cost in water provision
b) Reduced cases of water borne diseases among the locals.
c) Improved local economic development particularly for this area of Tullu Roba which is rapidly growing- the water will be a key growth factor
d) Institutional strengthening & Capacity building for IWASCO due to increased revenue collection
e) Improved nutrition due to availability of vegetables in kitchen gardens Reduction in
f) Resilience to Climate Change: Solarization produces clean energy making water access more reliable during power outages or fuel shortages.

g) Energy Resource Conservation: Solar energy is renewable, reducing dependence on non-renewable fossil fuels.

Negative Cumulative impacts

a) Impacts associated with aquifer water availability and water quality including: Intrusion of salt water, Pollution induced by maintenance of other boreholes and Land subsidence, deterioration of water quality
   Mitigation
   i. Water quality should be checked at key times of the year for bacteriological and chemical contamination in accordance with national guidelines
   ii. The borehole yields shall be regularly monitored in line with WRA requirements

b) E-waste from Solar Batteries: improper disposal of solar batteries can lead to environmental contamination.
   Mitigation
   i. Undertake environment audit annually to ensure that an e-waste management system is in place
   ii. Engage waste recyclers to handle recoverable materials from the project
   iii. Purchase electronic materials from authorized dealers to increase durability

7.2.1 Decommissioning Phase

The project shall bear detrimental impacts if necessary measures are put in place to prevent environmental hazards and risks resultant of the abandonment. This may include the borehole safetyand security issues, the conveyances and the changes to the concerned community.

Mitigation measures

- The Proponent shall subject the project to an abandonment environmental and social impact assessment or risk management in the event of closure of the project.
- The process shall involve all the concerned parties
- The legislations and best environmental practices prevailing then shall apply.

8 ENVIRONMENTAL AND SOCIAL MANAGEMENT & MONITORING PLAN

8.1 Introduction

Several impacts have been identified that are likely to affect the project both positively and negatively. They have also been identified based on three different project phases: construction, operation and decommissioning phase. A plan illustrating how the identified impacts will be managed throughout the project cycle has been formulated in Table 8-1 below. However, it is important to note that before the construction commences, the contractor will be required to develop an updated Construction Phase-Environmental and Social Management Plan (CP-ESMP) that will be implemented during the construction phase of the project.

8.1.1 Management Responsibility of ESMMP

In order to ensure the sound development and effective implementation of the ESMMP, it is necessary to identify and define the responsibilities and authority of the various persons and Organizations that will be involved in the project. The following entities should be involved in the implementation of this ESMMP:

- IWASCO
- NEMA Isiolo County
- Contractor
- Design Consultant;
- County Government of Isiolo

8.1.2 IWASCO

IWASCO the project proponent, will be charged with the responsibility of implementing ESMP. This will be achieved by inclusion of the ESMP provisions in the tender documents and conducting ESMP monitoring to ensure the objectives of this ESMMP are met. Further, the ESS unit will be charged with the responsibility of overseeing the implementation of the ESMP

8.1.3 National Environment Management Authority (NEMA)

NEMA is tasked with overseeing and coordinating all aspects pertaining to the environment, serving as the primary governmental instrument in Kenya for implementing policies related to environmental matters. The Authority has an oversight mandate in ensuring proponents implement project ESMPs.

8.1.4 The Contractor

The person/firm contracted to drill the borehole will be required to comply with the requirements of the ESMMP within this report. To ensure strict compliance environmental specifications of this ESMMP should form part of the contract documents. The contractor will provide weekly reports on the implementation of the ESMMP.

8.1.5 County Government of Isiolo

The relevant departmental officers in Isiolo County will provide advisory and institutional monitoring services according to existing guidelines and policies e.g. water quality monitoring by WRA and Department of Water

Impact	Mitigation/s Remedial Action/s	Implementation agency/ies	Monitoring Indicators and Freq. (F)	Mitigation target	Mitigation Cost/s (KShs)
CONSTRUCTION PHASE					
Restriction of land use within the borehole site	• A letter has been provided indicating that the community has accepted to allow construction of the borehole within the mosque; • The area to be utilized for the proposed works has been marked • The host community is aware of the proposed development and the anticipated benefits which they will gain from this development	IWASCO	Land use agreements signed Delineated area for borehole drilling Community awareness meetings	Zero conflicts on drilling area	10,000 (meetings & delineation works)
Noise Pollution	• Install portable barriers to shield the drilling rigs and drilling bits to minimize noise • Drilling limited to daytime, avoid weekends when prayers/madrasas are ongoing and ensure noise levels are kept to a maximum of 55 dBA • Provision of appropriate personnel protective equipment to workers	Contractor	-Presence and condition of barriers around drilling rigs and bits. -Noise level readings at various points within 1km radius below 55 dBA, drilling schedule developed -Availability and enforcement of PPE use.	Minimal noise levels	50,000 (hiring portable barriers, noise PPEs)

	• Observe drilling protocols e.g., use of barricades, notification should be done 14 days to the start of the works • Traffic management to minimize noise e.g. minimum idling time, no hooting policy • Sensitize workers to avoid shouting, loud music and banging of equipment		-Drilling protocols instituted -Traffic management policy developed & enforced -Worker's sensitization schedule		
Site Safety, Security, and Health Risks	• Barriers shall be erected to prevent unauthorized access to the project sites by Mosque members, residents and other unauthorized persons • Security personnel shall be deployed to secure the safety of the workers and property against vandals and to control access for safety purposes; • The Contractor shall have his workers appropriately trained on safety and health matters-safety talks shall be held on a weekly basis; • Construction vehicles will observe the required speed limit of 50 KM/H -Isiolo town, residential area	Contractor	-Presence of barriers around project site. -Security personnel deployed -Safety talks shall be held on a weekly basis; -Traffic safety policy developed -Incidence book availed -Worker Insurance cover provided -Availability of sanitary facilities on site- -Presence of the EHS officer on site	Safety and secure sites	50,000 (safety PPEs, security personnel, first aid kit)

	• Any accident, incident or hazardous situation should be reported immediately it occurs or identified; • The contractor shall provide insurance cover for any eventuality during work to the employees; • The proponent/contractor shall provide adequate and suitable sanitary facilities for workers during construction period; • The Contractor shall deploy as EHS officer at the project 'site' to foresee implementation of the EHS • Security personnel will be employed to oversee site security issues during construction of the borehole; • ; and • The Contractor shall abide by the all the relevant provisions of OSHA, 2007 and other relevant legislations		-First Aid Kit availed on site -Emergency contact for a health facility provided to site agent & EHS officer		
Worker's welfare (hygiene and sanitation)	• The contractors shall provide, free of charge, appropriate PPEs	Contractor	- PPE provided & distributed -Drinking water points on site	Safe and health working environment	20,000 (drinking water PPEs)

	• The Contractor shall provide clean portable drinking water for the workers • The Contactor shall provide first-aid services • Sanitation facilities for both sex including a handwashing facility- Contractor can negotiate with the Mosque to use its facilities and ensure they are kept clean • The Contractor shall communicate and implement the contents of the EHS policy of the Company to the employees • The Contractor shall make available emergency services at the site/ camp; • The Contractor shall retain a well trained and experienced EHS officer at the site		-Sanitation facilities availed -EHS officer deployed		
Effects on flora (plants/vegetation)	• The Contractor and other project participants must ensure minimal disturbance to existing vegetation	The Contractor	-Clearly marked access route -Site restoration plan	Restoration activities implemented	10,000 (landscaping)

	by marking out access routes and construction area • The project will make provision for tree planting within the site restoration activity				
Water Quality	• Designate an equipment servicing location away from the proposed site • Appropriate storage of fuel and Materials on site • The contractor should engage a licensed waste collector to manage all the waste • Undertake water quality monitoring after construction to establish any contaminants in the water	The contractor	-Location maps showing storage areas and borehole sites - Contracts or agreements with licensed waste collectors - Water quality test results (e.g., levels of contaminants, pH, turbidity)	Zero Contamination	30,000 (waste collection, water quality test)
Waste Water management	• Engage licensed waste company to handle all drilling wastes including waste water	Contractor WRA	-Waste collector engaged to handle waste water -	No contamination	50,000 (waste water collection, monitoring,

	• Ensure that all fuel and hazardous materials are stored securely away from the borehole site to prevent leaks. • Establish designated areas for equipment servicing that are also distanced from the borehole location. • Conduct regular water quality assessments post-drilling to detect any contaminants in the water • Inform local communities about potential risks associated with borehole drilling				sensitization meeting)
Project Related Conflicts	• The project shall have in place a conflict/issues management policy including engaging an EHS expert who will manage the project related conflicts • All matters or issues that may arise during construction shall be documented and presented to the	Contractor	- Contactor's grievances management policy - Complete and accurate documentation of all construction-related issues. - Documentation and tracking of court cases. - Number of unskilled labor positions filled by locals.	EHS expert engaged to handle conflicts Grievances & Redress record book provided Evidence of how grievances are addressed	40,000 (EHS, grievances book etc)

	relevant persons-IWASCO, Contractor, Administration Officers • Sensitive matters beyond control of the relevant persons or institutions shall be referred to the court of law. • The Contractor shall ensure that locals are given first priority during recruitment of workers. Unskilled labour opportunities will be given to the locals • In specialized tasks, the Contractor shall ensure that apprentices are from the local community to allow for skills transfers • The contractor shall hold periodic meetings with community representatives and local administration to communicate the project plan, design and progress.				
HIV/AIDs and STIs and Alcohol or Substance Abuse	• Establish clear, accessible channels for workers to report grievances related to sexual harassment during the project period.	Contractor	- Grievances redresss policy - Contractor's policy on Sexual Harassment & Gender based violence	Low or zero HIV/Aids prevalence and sober and	20,000

	• Ensure the contractor has an explicit policy on Sexual Harassment, Gender based Violence, Substance Abuse & HIV/AIDS • Conduct education and awareness campaigns on HIV/AIDS, STIs, and the dangers of substance abuse.			productive workforce	
Gender Based Violence and Sexual Exploitation and Abuse	• All workers should attend a mandatory sensitization meeting on code of conduct and sign the code of conduct. • Awareness creation and community outreach to educate locals about their rights and available reporting mechanisms	IWASCO Contractor	-Sensitization meeting on code of conduct held -Evidence of awareness creation to locals e.g. materials on the site	Zero reports of sexual abuse & exploitation	10,000 (meeting venue)
Child Labour	• The contractor should adhere to the labour laws; • The client should conduct regular inspections to ensure no children are working on-site. • Using law enforcement agencies to monitor and apprehend those who contravene the laws.	IWASCO	-Employment policy developed	No child is engaged in the project works either directly or indirectly	Inspection/ monitoring fee

Conflicts over water access and management	• Having a community driven Water Resources Users Associations committee • Participatory decision-making involving all stakeholders benefiting from the borehole water.	IWASCO WRA	-WRUA or Water Committee established	-Zero conflicts on water distribution	20,000 (establishment of water committee)
Politics and Political Good will	• The project will provide for extensive public participation; • The community shall be sensitized on negative political influence on projects implementation. • The politicians shall be encouraged to desist from negative politics for the sake of the community economic development	IWASCO County Government	-Number of community sensitization meetings held prior to the project -Number of Engagements with Politicians	Encouraging Positive Political Engagement	10,000 (meeting venue)
OPERATION PHASE					
Vandalism of installed infrastructure	• Continuous engagement -meetings, liaison staff	IWASCO	-Frequency of Community Engagement Meetings -Percentage of Households Paying for Water	Infrastructure is secured	30,000 p.a (meetings)

	• Foster household ownership of the infrastructure through payment of water by households • Enforce law against reported cases of vandalism		-Number of Vandalism Incidents Reported		
Water Quality	• Provide for periodic water quality monitoring at strategic points including the source, WTP and along the distribution lines • Use high-quality casing Materials and properly seal the annular space between the borehole wall and casing • Install a screen in the borehole casing near the aquifer to filter out sediment and prevent entry of larger particles into the well • Install a secure and sanitary wellhead to prevent surface water, insects, and debris from entering the borehole and potentially contaminating the water. • Implement a regular monitoring program to assess water quality	IWASCO	- Water Quality Parameters such as pH Monitoring - Borehole Casing and Screen Inspection - Community sensitization	Water quality is within recommended level	60,000 p.a (meetings, water tests)

	parameters such as pH, turbidity, total dissolved solids (TDS), microbial contamination (e.g., coliform bacteria), and chemical contaminants (e.g., nitrates, heavy metals) • Maintain the borehole and pumping equipment regularly to prevent buildup of sediment, biofilms, and other sources of contamination that could affect water quality. • Educate local communities on the importance of water quality protection, proper sanitation practices, and the potential sources of contamination that could impact their borehole water • Develop an emergency response plan to address sudden water quality issues or contamination incidents including: protocols for water testing, notification of stakeholders, and remediation actions.				

	• Secure borehole area to prevent accidental or deliberate water contamination				
Water wastage and other losses Conservation	• The piping Material should be resistance to abrasions from external elements to prevent leakages • Establish a monitoring system to allow for prompt detection of leakages and repairs • Create awareness among project beneficiaries on the need to use water judiciously. • Build the capacity of the water utility to continuously improve the efficiency of the water supply system including reduction of non-accounted water, installation of efficient technologies e.g. automated water points in water kiosks.	IWASCO	Material Durability Ratings -Leakage Incidents -Water Usage Trends -Training Sessions	Reduced water loss	50,000 p.a

Energy Use	• Select high-quality solar panels, inverters, mounting structures, and other components from reputable manufacturers with proven track records. • Hire certified and experienced solar installers who follow industry best practices and adhere to manufacturer guidelines for installation. • Ensure the solar panels are kept clean and free of debris to maximize sunlight absorption. • Regularly remove dirt, dust, bird droppings, and leaves that can reduce efficiency • Periodically inspect and tighten electrical connections to prevent loose connections that can lead to system inefficiencies or failures. • Install a monitoring system to track the performance of the solar panels, inverters, and overall system.	IWASCO	-Quality certifications and warranties from manufacturers. - Performance metrics and visual inspections of panel cleanliness. - Visual inspection for loose connections, and checking for system performance drops.	Reduced energy loss	10,000 p.a (solar system maintenance)

	• Ensure all electrical components are properly weatherproofed and protected from rain, humidity, and extreme temperatures. • Ensure proper charging and discharging cycles to prolong battery life • Schedule periodic inspections by qualified technicians to check for wear and tear, corrosion, and other signs of potential problems.				
Impact on vulnerable and marginalized groups	• Involve vulnerable groups in all stages of borehole planning, construction, and management to ensure their needs and concerns are addressed. • Ensure equitable access to borehole water by implementing transparent allocation mechanisms and considering the needs of vulnerable groups in water distribution plans. • Implement pro poor water supply program to increase water access	IWASCO	-Stakeholder Engagement - Feedback Mechanism - Allocation Mechanisms	Ensure equitable and sustainable access to water for vulnerable and marginalized groups	30,000p.a

	among the marginally poor groups in Isiolo town. • Implement sustainable groundwater management practices to prevent over-extraction and ensure the long-term availability of water resources. • Regularly monitor the impact of boreholes on vulnerable groups and adjust management practices accordingly to address emerging issues.				
DECOMMISSIONING PHASE					
End of project strategy	• The Proponent shall subject the project to an abandonment environmental and social impact assessment or risk management in the event of closure of the project. • The process shall involve all the concerned parties	IWASCO	Decommission strategy/Plan Freq: End of Project	Environmental Protection	TBD

	• The legislations and best environmental practices prevailing then shall apply.				

9 CONCLUSION AND RECOMMENDATION

9.1. Conclusion

The proposed project seeks to increase water supply in Tullu Roba village, Tullu Roba Location in Isiolo County. The project entails surveys and site selection, conducting initial hydrogeological and geophysical assessments to identify suitable groundwater sources and optimal drilling locations. These investigations have already been conducted and a report provided. The report established that the area will yield water at 230 meters. The proponent is in the process of securing permits and approvals from WRA and NEMA. Once permits and approvals are secured, drilling operations commence,. Protective measures such as casing and gravel packing will be installed to prevent contamination and ensure borehole stability.

Water quality testing in accredited laboratories will be done to ensure compliance with consumption standards before handing over the operational borehole to IWASCO for maintenance and monitoring. The project also evaluates alternatives including a no-project scenario, highlighting that without intervention, IWASCO would continue facing irregular water supply and high operational costs due to electricity bills. Existing infrastructure problems like low storage capacity would persist, exacerbating water shortages and impacting health, sanitation, and economic growth. Furthermore, without the project, local skills would be underutilized, and risks of water-related conflicts would increase, hindering overall development and service distribution.

The project's proposed sites were selected based on geological suitability, accessibility, environmental impact, and future land use, offer a sustainable solution. Utilizing solar-powered pumping, the project aims to ensure reliable water supply, mitigate environmental impacts, and enhance water security despite climate variability. The construction phase is expected to provide local economic benefits and job opportunities but requires measures to mitigate environmental risks and community conflicts. During operations, benefits include regular water supply, reduced waterborne diseases, contingent upon strict water quality monitoring and sustainable management practices.

The project is located inside a communal land area belonging to Al Rahim community mosque compound at Tullu Roba . The section of the land is unoccupied and there are no livelihood activities within the compound. Therefore, there are no Persons Affected by the project, no displacement and no need for compensation.

9.2 Recommendations

The recommendation of this study is that the proposed project be allowed to proceed on strict condition that the environmental management plan is implemented and follow-up is made to ensure compliance as may be directed by NEMA. Recommendations for the prevention and mitigation of adverse impacts are as follows:

i. Environmental and Social Management Plan should be communicated to all the responsible actors including Contractor, IWASCO
ii. The contractor should develop a Construction Phase-ESMP for the proposed project
iii. The proponent should establish an environmental and social unit to oversee the implementation of the Environmental and Social Management Plan
iv. The proponent should institute a periodic monitoring plan to ensure regular reporting on environmental and social indicators
v. The proponent should document all environmental and social incidences occurring during project construction and operation

REFERENCES

Arnesano, R .(2020).Small community water supplies in the Isiolo County, Kenya.

GOK (2023) Isiolo County Integrated Development Plan 2023-2027

GoK. (2006). Environmental Management and Co-ordination (Waste Management) Regulations. Kenya: Government of Kenya.

GoK. (2007). The Water Resources Management Rules, 2007. Government of Kenya.

GoK. (2012). Employment Act; Kenya: National Council for Law Reporting.

GoK. (2012). Food, Drugs and Chemical Substances Act 1992 (Revised edition 2012). Nairobi; Kenya: National Council for Law Reporting.

GoK. (2015). Fifth National Report to the Conference of Parties to the Convention on Biological Diversity: Government of Kenya.

Gok. (2015). The Environmental Management and Co-ordination (Amendment) Act,2015. Nairobi; Kenya: The Government Printer.

GoK. (2017). The Physical Planning Bill. Nairobi; Kenya: Government Printer.

Thiakunu et al., (2023) Camel Herd Structure and Performance in Isiolo and Marsabit Counties, Kenya

UN. (2015). Sustainable Development Goals. Retrieved November 29, 2019, from United Nations Website: https://sustainabledevelopment.un.org/?menu=1300

World Bank (2001). Environmental Assessment Sourcebook Available at: World Bank Environmental Assessment Sourcebook

World Bank (2001). Operational Policy 4.04 - Natural Habitats Available at: [World Bank OP 4.04 - Natural Habitats](https://documents.worldbank.org

World Bank (2003). Social Assessment Sourcebook Available at: World Bank Social Assessment Sourcebook

EXPERT PRACTISING LICENSE



EAE 23061620

FORM 7 (r.15(2))

nema

NATIONAL ENVIRONMENT MANAGEMENT AUTHORITY(NEMA)

THE ENVIRONMENTAL MANAGEMENT AND CO-ORDINATION ACT

ENVIRONMENTAL IMPACT ASSESSMENT/AUDIT (EIA/EA) PRACTICING LICENSE

License No : NEMA/EIA/ERPL/20611

Application Reference No: NEMA/EIA/EL/27771

M/S **REBECCA KARANJA**
(individual or firm) of address
P.O. Box 43844 - 00100 Nairobi

is licensed to practice in the capacity of a (Lead Expert/Associate Expert/Firm of Experts) **Lead Expert**

General

registration number **2860**

in accordance with the provision of the Environmental Management and Coordination Act Cap 387.

Issued Date: 1/25/2024 Expiry Date: **12/31/2024**

Signature.....

(Seal)
Director General
The National Environment Management Authority

P.T.O.

ISO 9001 : 2015 Certified

APPENDIX A: Letter of Agreement

The Management Committee
Al Rahim Mosque
Tullu Roba
30th June 2023

The Managing Director
Isiolo water and Sewerage Company Ltd
P.O. Box 491
ISIOLO

RE: APPROVAL OF YOUR REQUEST FOR SPACE FOR BOREHOLE DRILLING

Your letter dated 6th June 2023 REF: IWASCO/MD/VOL.4/107 on the above issue refers,

The management committee of Al Rahim Mosque and entire community of Al Rahim Mosque are happy to inform you that your request for a space for drilling a borehole in our Institution has been unanimously and unconditionally agreed. Thank for engaging with Al Rahim Mosque committee and entire Al Rahim community.

Thank you

Yours Faithfully

Mohammed Salesa
Chairman
Al Rahim Mosque

AR-RAHEEM MASJID
Date:
P. O. Box 200 - 60300 ISIOLO

Noted
30/6/23

ISIOLO WATER & SEWERANGE COMPANY LTD.
RECEIVED
30 JUN 2023
P O. Box 491 - 60300, ISIOLO
Email:isiolowater@yahoo.com

APPENDIX B: Attendance List and Minutes of Meetings

MINUTES OF BARAZA ON ENVIROMENTAL AND SOCIAL IMPACT ASSESSMENT FOR THE PROPOSED ISIOLO BOREHOLES DRILLING AND SOLARISATION HELD ON 12/6/2024 at ISIOLO CDF Offices

PRESENT

ATTENDANCE (ATTACHED SIGN LIST)

The meeting was attended by 49 members drawn from all the project areas.

Total Number of Attendees: 49

Men: 11

Women: 16

Youth: 12

Isiolo Water Staff: 6

Consultant team: 4

MIN 1. PRELIMINARIES

The meeting was called to order at 11.00 am and began with a word of prayer Dansoye Abkul.

Introductions

Isiolo water and sewarage company staff present Include:

- ✓ Nura Bonaya- The Finance Manager
- ✓ Catherine Mwenda-Internal Auditor
- ✓ Liban Guracha-Assistant Technical Manager
- ✓ Salod Jattan

Mr Liban gave a brief of the Isiolo area indicating that it's a fast growing area but there is inadequate supply of water. The area experiences recurrent droughts which aggravates the water scarcity. Community members can go for more than one week without water The Isiolo water project involves : Drilling and equipping of 5 boreholes, Solarisation of 7nr bore holes and Purchase and installation of 1,610 DN 15mmconsumer meters.

Ms Catherine Mwenda invited the consultants team to introduce themselves,The team comprised of:

- ✓ Dr. Rebecca Karanja (team leader)– Environmental Expert
- ✓ Dr Purity Muthoni- ESIA Expert
- ✓ Ms. Eunice Wanjiru - Sociologist
- ✓ Dr. Florence Ngari – Biodiversity Expert

The Members present were given a chance to introduce themselves and Rebecca Karanja took the community members through the ESIA requirement. She explained that EMCA 1999 stipulate that projects should have social and environmental compliance. Since 2022 in Kenya, its mandatory to carry out an ESIA for development projects and submit the ESIA report to NEMA for project approval and licensing. Rebecca further elaborated that a comprehensive report should include participant's names and signatures for meetings attended and also photos for community meetings. She introduced the enumerators drawn from the community who were to be involved in household surveys and indicated that they will be visiting households.

MIN 2. PROJECT AWARENESS AND ACCEPTANCE

The community were sensitized on the project components and the requirement for the public participation.

By a show of hands, all the participants indicated that they were aware of the project and they were willing to support it and have it implemented soonest possible.

MIN 3. ANTICIPATED PROJECT IMPACTS

The community members were able to enumerate the impacts of the project on them and the environment. They listed both the positive and negative impacts of the project. Some of the positive impacts include:

- ✓ Continuous water supply
- ✓ Establishment of Kitchen gardens
- ✓ Increased value of rental houses
- ✓ Saving of money and time
- ✓ Reduction of family conflicts
- ✓ Lighting using the solar panel

- ✓ Job creation during the implementation
- ✓ Enough water for domestic animals
- ✓ Water will reach out to the growing population
- ✓ Improvement of academic performance as children will concentrate on their studies
- ✓ Improved security since people will not have to go far to draw water

Some of the concerns highlighted by the community include:

Concern raised by the community	Consultants response
The boreholes may yield salty water unfit for human consumption	The water from the boreholes will be tested by Isiolo water company to ascertain its safety for human consumption.
Clogging of pipes by dirty water	The water will also be subjected to water treatment including sedimentation to make it clean
Construction Materials and waste may be dumped carelessly	All waste Materials and spoil will be disposed at NEMA approved sites
Bore hole may interfere with ground water levels (water tables)	A hydrogeological survey has been done to ascertain the water levels in the water table so as to get the place that will yield the highest amounts of water.
Possibilities of radioactive Materials from solar cells	The consultants assured the community that solar cells are just like the normal cells and are not associated with radioactivity.
Increased costs of the water tariffs	The client confirmed to the community that the unit cost will remain the same but water supply will be improved

The possible negative impacts from the project include:

Negative Impacts	Mitigation measures

Disciplacement of persons	The client assured them that some the boreholes are located in Isiolo water company land and the ones that are located in mosques and schools, a memorandum of understanding plus letters of agreements will be availed.
Increased traffic flow	The Contractor will plan vehicle routes to target low traffic hours Ensuring the visibility of personnel through their use of high visibility vests when working in or walking through heavy equipment operating areas; Ensuring moving equipment is outfitted with audible back-up alarms;
Devegetation due to access road construction	While opening new areas for access, the top soil shall be stockpiled and preserved for future restoration use; Seeds should be collected from seeding plants, for planting in alternate areas including upstream of the project / in the project catchment area.
Noise and vibration generation from mobilization of equipment	Movement of the heavy machinery should be limited only to day time, e.g. 6 am to 7 pm
Dust pollution	Use of dust control methods, such as covers, water suppression, or increased moisture content for open Materials storage piles, or controls; Care must be taken in the unloading construction Materials

MIN 5. COMMUNITY EXPECTATIONS FROM THE PROJECT

1. Provision of jobs during project implementation
2. Involvement project management
3. Reduced water bills
4. Regular water supply

MIN 6. ADJOURNMENT

There being no other business the meeting ended at 1. PM with a word of prayer from one the community members. The youth and women and men were requested to meet separately with the team of experts.

Minutes signed by:

ISIOLO WATER & SEWERAGE COMPANY LTD
P. O. Box 491 - 60300, ISIOLO
Email:isiolowater@yahoo.com

Client : ----------

Date ---------- 12/6/24. ----------

Consultant: ---------- ----------

Date: ----------

Consultant Date 14/6/2024

---------- ----------

ATTENDANCE SHEET FOR COMMUNITY JOINT BARAZA

IWASCO
Isiolo Water & Sewerage Company

ATTENDACNE LIST FOR BARAZA FOR CLSG II PROJECT ESIA HELD AT CDF OFFICE HALL ON 12TH JUNE 2024

NO	NAME	VILLAGE/ORGANIZATION	CONTACT	SGINATURE
1	Bakaso Dabaso	Checheles/E.V.C	0713182951	
2	Wario Hachin	Checheles/Ramadha	0797986668	
3	Waro Ti Dibo	Checheles/EVC	0701078065	
4	Hassan Abdulla	T/Roba	0790264161	
5	Suleiman Sida	T/Roba	0721-317188	
6	Lenna Hammu	Waso	0729740375	
7	Vincent Kini	Mwangaza	0707701324	
8	Meikam Mengesha	Kulomawe/Waso	0791803197	
9	DANSOYE ABKUL	T/ROBA	0700160892	
10	Wario Dida	Ramadan	0714422081	
11	TAPI TADICHA	Ramadan	0701962852	
12	ABDULLAHI ABAMBA	Showground	0768769771	
13	Hawai Mohamed	Showground	0724399037	
14	Fatuma Bike	Showground	0715407677	
15	Amina Golicha	Checheles	0729615121	
16	ABDUL'S DIMA	Mwangaza	0701463805	
17	Nancy Kuganbi	Mwangaza	0725876138	

18	Abdia Diba	TULLU ROBA	0720413368	
19	HAWO HASS JIRMA	Chelchele	0701005438	
20	JIRMA-ABDUBA	RaMaDa	0713116309	
21	Suleiman Jaljila	Water Care	0792611667	
22	FRIDAH NTARA	KWASO	0723597669	
23	IBRAHIM HUSSEIN	MATER	0788877817	
24	Margaret Kagure	Water care	0726951516	
25	SARAH KANANU	WASO	0728131666	
26	SARAH OGETO	WASO	0729381342	
27	JOHN EARL.	OOP Interior	0740171451	
28	Rebecca Karanja	water sector consultant	0722601849	
29	Cathrine Mwendwa	IWASCO	0710180172	
30	LIBAN GURACHA	IWASCO	0720114662	
31	Nuno Hassan	Tulu Roba	0707007230	
32	Salad Jaffa	CITIZENS	0713119805	
33	EUNICE NDUATI	Social consultant Water sector Fund	0725894389	
34	FLORENCE NGARI	Bio diversity expert water sector	0700406016	

MINUTES OF A COMMUNITY MEETING ON ENVIROMENTAL AND SOCIAL IMPACT ASSESSMENT FOR A PROPOSED BOREHOLE AT TULLO ROBA MOSQUE ON 27/8/2024 AT TULLO ROBA BOREHOLE SITE

PRESENT

ATTENDANCE (ATTACHED SIGN LIST)

Total =23

Women =10

Men=13

AGENDA

1. **Introduction**
2. **Brief of the proposed project from Isiolo Water & Sanitation Company (IWASCO)**
3. **Project Concerns & Recommendations by the beneficiaries and host community**
4. **A.O.B**

MIN 1: PRELIMINARIES

The meeting started at 9.40am with a word of prayer from Sheikh Hassan. The IWASCO team leader invited the consultant and community members for introduction.

MIN 2: BRIEF OF THE PROPOSED PROJECT FROM IWASCO

The IWASCO team leader gave a brief of the project. The increased population has led to a strain on the existing water resources. He indicated that IWASCO has approached WSTF for funding so as to increase water supply in some areas including Tullo Roba area. The project will entail borehole drilling, steel tank installation and solarization of the pumping system. The aim of this exercise is to understand whether the community welcome the project.

MIN 3: PROJECT CONCERNS & RECOMMENDATIONS BY THE BENEFICIARIES AND HOST COMMUNITY

The Consultant provided a brief of the assignment. She further indicated that this meeting was a build up of the previous meetings held at the Sub County level at Isiolo Town. Community members were informed of the importance of the environmental and social impact assessment. They were further welcomed to give their comments, concerns regarding the project. The following issues were raised:

g) **The community indicated that they welcome the project**
h) **It was noted that population in the area has grown rapidly and the water supply has remained constant**
i) **It was noted that IWASCO had been consistent in ensuring increased water supply and the community commended the company for these efforts**
j) **Will the borehole yield salty water unfit for human consumption? The water from the boreholes will be tested by Isiolo water company to ascertain its safety for human consumption.**
k) **How will be issue of clogging of pipes by dirty water be addressed? The water will also be subjected to water treatment including sedimentation to make it clean**
l) **Bore hole may interfere with ground water levels (water tables) A hydrogeological survey has been done and ascertained the water levels in the water table so as to get the place that will yield the highest amounts of water.**

MIN 4. A.O.B

The IWASCO team assured the community that they would follow through the project to ensure it is implemented. There being no other business the meeting ended at 10.30am

MINUTES SIGNED BY:

Minutes signed by:

ISIOLO WATER & SEWERAGE COMPANY LTD
P. O. Box 491 - 60300, ISIOLO
Email:isiolowater@yahoo.com

Client : ----------

Date 27/8/24. ----------

Consultant ---------- Date 27/08/2024

APPENDIX C: BILL OF QUANTITIES

TULLU ROBA BOREHOLE DRILLING

ITEM No	ITEM DESCRIPTION	UNIT	QTY	RATE KSHS	AMOUNT Kshs
1	Allow for acquiring of borehole drilling authorization permit	L/S	1	60,000.00	60,000.00
2	Allow for NEEMA Licence	L/S	1	120,000.00	120,000.00
3	Allow for Hydrogeological Survey	L/S	1	100,000.00	100,000.00
4	Mobilization of drilling unit and assembling the same at borehole site, dismantling and demobilization on completion.	L/S	1	50,000.00	50,000.00
5	Allow all costs involved in providing water for all requirement of the contract drilling ,field camp etc.	L/S	1	68,950.00	68,950.00
6	Drilling of 10 inches diameter hole to provide for finished cased diameter of 152mm (6-inches). Incude for installation and removal of temporary casings.	M	150	5,000.00	750,000.00
7	Collection of formation samples and geological	NO	75	160.00	12,000.00 -

	logging after every 2M				
8	Supply and install 152mm(6-inches) plain steel casings	M	90	3,000.00	270,000.00
9	Supply and install 152mm(6-inches) slotted steel casing	M	60	3,500.00	210,000.00
10	Supply and install gravel pack of average grain size 2mm-4mm	TON	20	6,000.00	120,000.00
	Development of borehole by use of chemical and physical method- chemical treatment and high				5,200.00
8	pressure air or water jetting including inserting and with drawing of development equipment until clear water is obtained.	HRS	8	650.00	
	Test pumping and recovery measurements				
11	· installing and withdrawing of test pumping equipment	NO.	1	50,000.00	50,000.00
	· Continuous drawdown	HRS	24	800.00	19,200.00
	· Recovery measurements	HRS	8	600.00	4,800.00
12	Carry out borehole sterlization	L/S	1	600.00	600.00
13	Finishing and securing the borehole;		1	4,000.00	4,000.00


	1mx1mx0.5m finished slab. Include for grouting surround along annullar space	NO	1	7,000.00	7,000.00
	Mild steel 152mm borehole cap	NO	1	8,000.00	8,000.00
14	Chemical analysis of water samples	NO	2	6,000.00	12,000.00
15	Supply of documentation WRMA completion certificates	Item	1	20,000.00	20,000.00
16	Branding	L/S	1	50,000.00	50,000.00
17	Allow for supervision and contract Management	L/S	1	50,000.00	50,000.00
	TOTAL				1,991,750.00
	TOTAL Kshs.				1,991,750.00

EQUIPPING TULLU ROBA BOREHOLE

ITEM	DESCRIPTION	UNIT	QTY	RATE (Kshs)	AMOUNT KShs
1	Supply and Install a Borehole Grudfos Submersible Pump complete coupled with Motor capable of delivering 15m³/h against a head of 150m	NO.	1	650,000.00	650,000.00
2	Supply and fix 6mm² 4 core flat submersible drop cable	M	150	600.00	90,000.00
3	Supply and fix 6mm² 4 core underground cable	M	20	500.00	10,000.00

4	Supply and fit 1¼" adapter set	No.	1	8,000.00	8,000.00
5	Supply and fit 63mm dia. PVC Dayliff borehole pipe 3m length	No.	50	3,000.00	150,000.00
6	Supply and install 25mm airline pipes	No.	25	450.00	11,250.00
7	Splicing kit	No.	1	8,000.00	8,000.00
8	Supply and fit cooling sleeve	No.	1	8,000.00	8,000.00
9	Supply and fix 2" x 6" borehole cover complete with sundries	No.	1	8,000.00	8,000.00
10	Supply and install earth rod complete with clamp and earth cable	No.	1	2,000.00	2,000.00
11	Supply and install 63mm diameter water meter complete with all fittings	No.	1	45,000.00	45,000.00
12	Supply and install 63mm Non return valve	No.	1	10,000.00	10,000.00
	TOTAL				1,000,250.00
	GRAND TOTAL				
	DRILLING BOREHOLE				1,991,750.00
	BOREHOLE EQUIPPING				1,000,250.00
					2,992,000.00

APPENDIX D: ATTENDANCE LIST FOR FGD AT TULLU ROBA MOSQUE

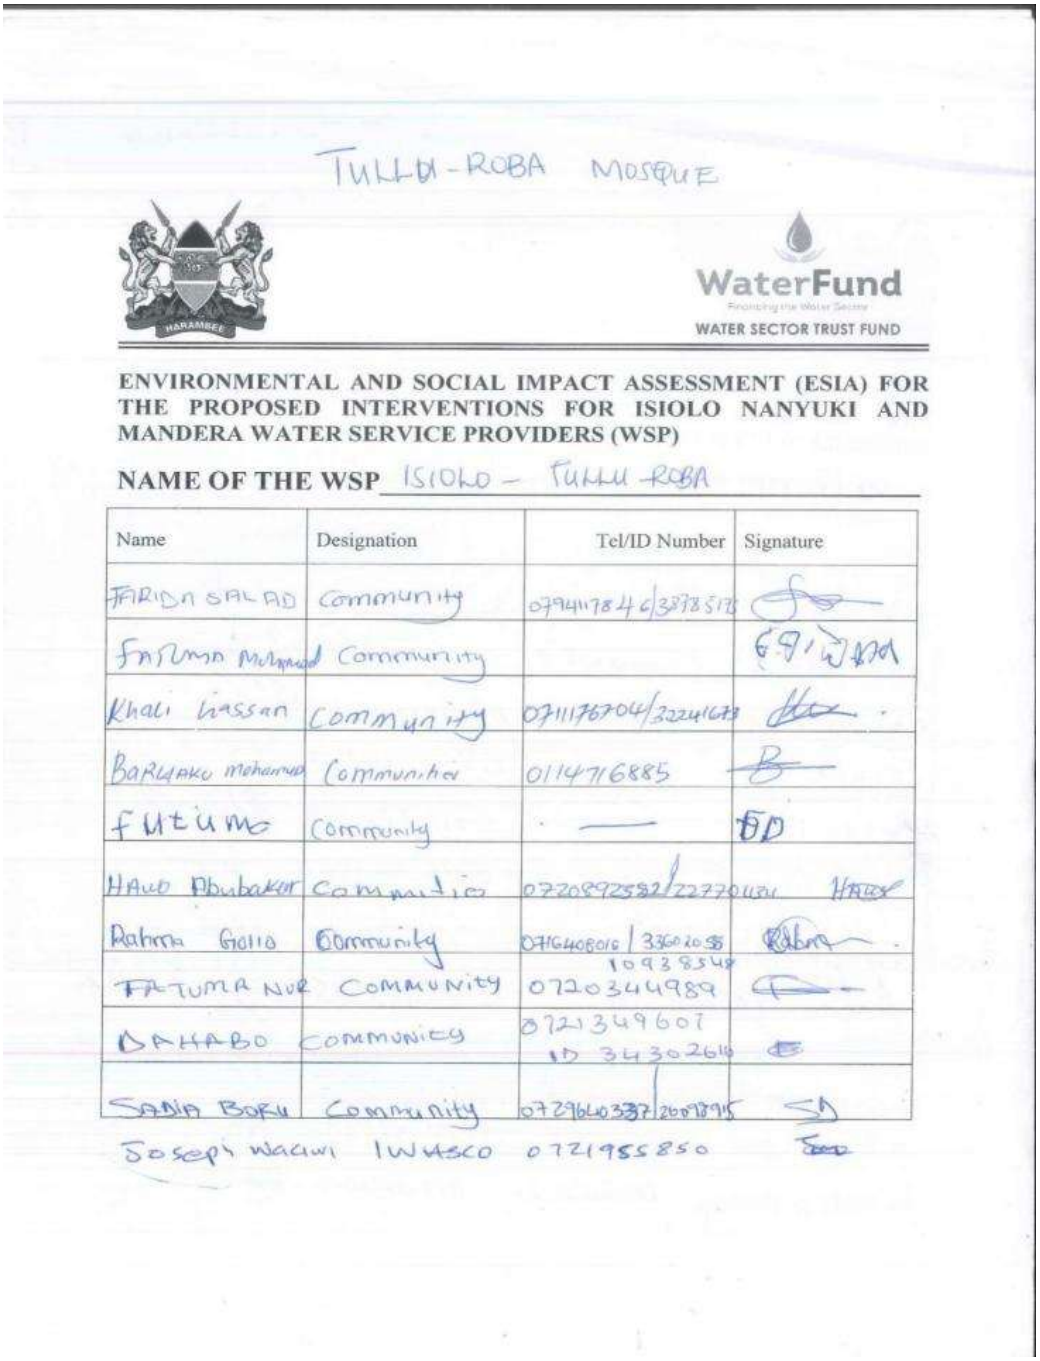

TULLU-ROBA MOSQUE

WaterFund
WATER SECTOR TRUST FUND

ENVIRONMENTAL AND SOCIAL IMPACT ASSESSMENT (ESIA) FOR THE PROPOSED INTERVENTIONS FOR ISIOLO NANYUKI AND MANDERA WATER SERVICE PROVIDERS (WSP)

NAME OF THE WSP ISIOLO – TULLU ROBA

Name	Designation	Tel/ID Number	Signature
FARIDA SALAD	Community	0794117846/33735178	
Fatuma Mohamed	Community		
Khali Hassan	Community	0711767704/32241678	
Barkhako Mohamud	Community	0114716885	
FATUMA	Community	—	
Halo Abubakar	Community	0720892582/22770481	
Rahma Golla	Community	0716408016/33602058 10938548	
FATUMA NUR	COMMUNITY	0720344989	
DAHABO	COMMUNITY	0721349607 ID 34302616	
SADIA BORU	Community	0729640337/20078915	
Joseph Wachiu	IWASCO	0721955850	